


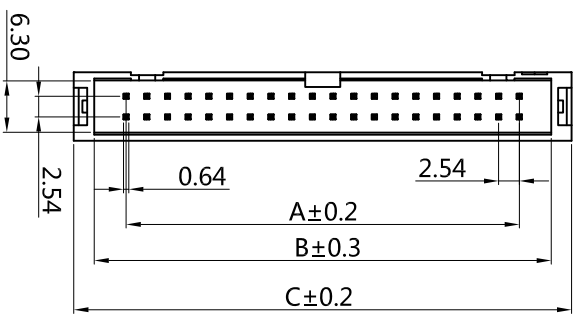
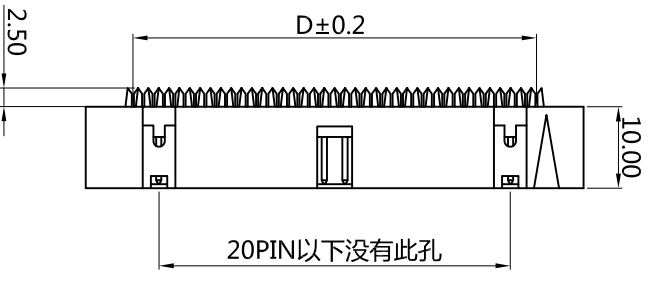
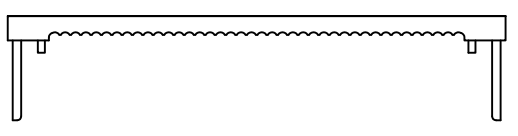


1 2 3 4 5 6 7 8

Current Rating: 1 Amps  
 Insulator Resistance: 1000Q/M Min at DC 500V  
 Dielectric Withstanding: AC 500V  
 Contact Resistance: 15mΩ MAX  
 Withs tan ding Voltage: AC 500V for 1 Minute.  
 Operation Temperature: -40~+105°C  
 Max processing temp: 230°C for 60seconds  
 Max processing temp: 260°C for 10seconds  
 Insulator material: Standard: Polyester, UL 94V-0  
 Standard: PBT+GF30%  
 Contact : Copper Alloy  
 Contact Plated: Gold or Tin over Nickel Plated

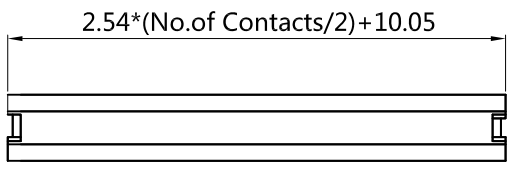


PIN	Dim A	Dim B	Dim C	Dim D
10	10.16	18.15	22.95	11.43
14	15.24	23.23	28.03	16.51
16	17.78	25.77	30.57	19.05
20	22.86	30.85	35.65	24.13
24	27.94	35.93	40.73	29.21
26	30.48	38.47	43.27	31.75
30	35.56	43.55	48.35	36.83
34	40.64	48.63	53.43	41.91
40	48.26	56.25	61.05	49.53
50	60.96	68.95	73.75	62.23
60	73.66	81.65	86.45	74.93
64	78.74	86.73	91.53	80.01

1. Insulator material: 6. Contact Plated:  
 A=PBT  
 2. Circuits: 10-64PIN  
 3. Tall Style:  
 B= With Ear  
 N= W/O Ear  
 4. 2=W/O SR  
 3=With SR  
 5. Color: BK=Black  
 GR=GRAY

7.Special Options  
 8. Packing:  
 B=Tube  
 C=Tray  
 E=Cap+Reel  
 F=Cap+tube  
 G=Cap+bag  
 H=Cap+bag  
 N=1Tap&reel

BF11 X - XX N 2 GR C 000 X  
 1 2 3 4 5 6 7 8



东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM 1:	BF11X-XXGRH0-C10
2:	
3:	

PART NO.	BF11X-XXN2GRC000X	X	.XX	.XXX
DRAWING NO	ZS-00025-J	EDITION:A1	ITEM: BH11	SCALE:1:1
DRAWN BY	Deng jin quan	2021-12-22		
APPROVAL BY	Chen xiao guang	2021-12-23		UNIT:M.M

1 2 3 4 5 6 7 8