



1 2 3 4 5 6 7 8




A


Current Rating: 2 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Finish: Gold Plated
 Standard: Nylon-6T

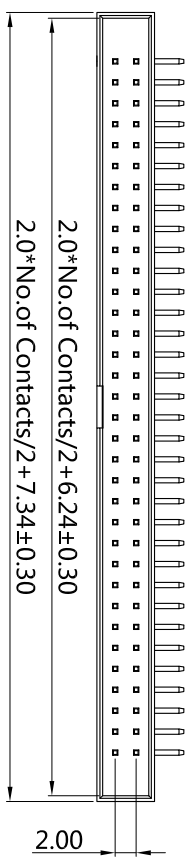


B

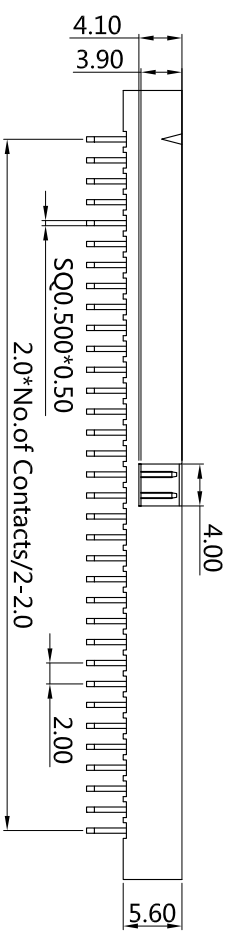

C

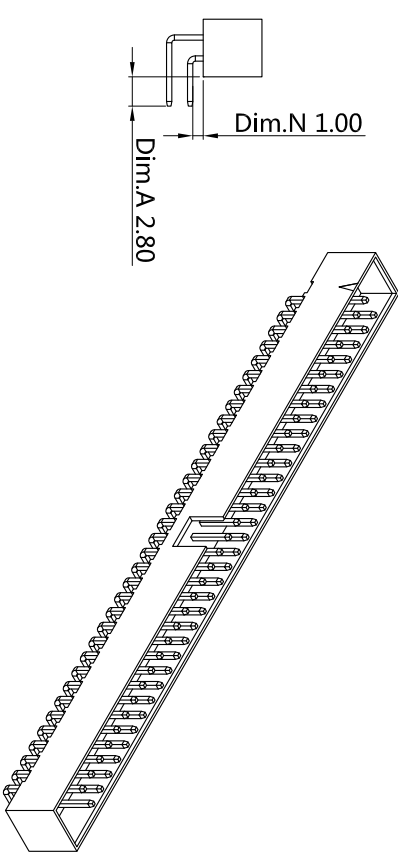


C



D

Recommended P.C. Board
 SMD Layout

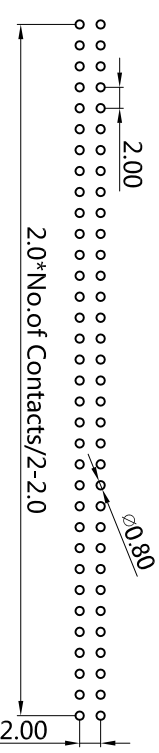

E

BH21 X - XX R0 XX X 000 X
 1 2 3 4 5 6 7

5.Contact Plated:

T= Matte tin over nickel
 W= Matte tin over nickel 150μ"
 Y=Brighe tin over nickel

L=Gold 1μ"
 E=Gold 5μ", Ni 50μ"
 G=Gold 10μ"
 J=Gold 10μ", Ni 50μ"

S= Gold Flash
 F= Gold flash, tin 50μ"
 A=Gold 3μ"
 C=Gold 0.8μ"

6.Special Options

7.Packing
 B= Tube
 C= Tray
 D= Box

E=Cap+reel
 F=Cap+tray
 G=Cap+bag
 H=Cap+bag
 N=Tap&reel

I=Gold 1μ"
 M=Gold 15 μ", Ni 50 μ"
 U=Gold 30 μ", Ni 50 μ"
 V=Gold 30 μ", Ni 50 μ"
 N=Gold flash ,NI

1.Insulator Material

N=PA6T
 L=LCP P=PA9T

2.Circuits:06~64pin
 3.Tail Style
 R0=90°

4.Color:BK=Black

(RoHS Compliant)



东莞市震升电子有限公司
 DONG GUAN QIAN SHEN ELECTRONICS CO., LTD

BOM	1: BH21X-XXBKHC4	PART NO.	BH21X-XXR0BKX000X	X	.XX	.XXX
	2: SQ0.5-10.6/14.6-X-C12	DRAWING NO	ZS-00014-J	±0.30	±0.20	±0.1
	3:	DRAWN BY	Deng jin quan	EDITION: A1	2020-11-29	SCALE: 1:1
		APPROVAL BY	Chen xiao guang	2020-11-30		UNIT: M.M

TEL:0769-85350515 FAX:0769-85845060

1 2 3 4 5 6 7 8

F