
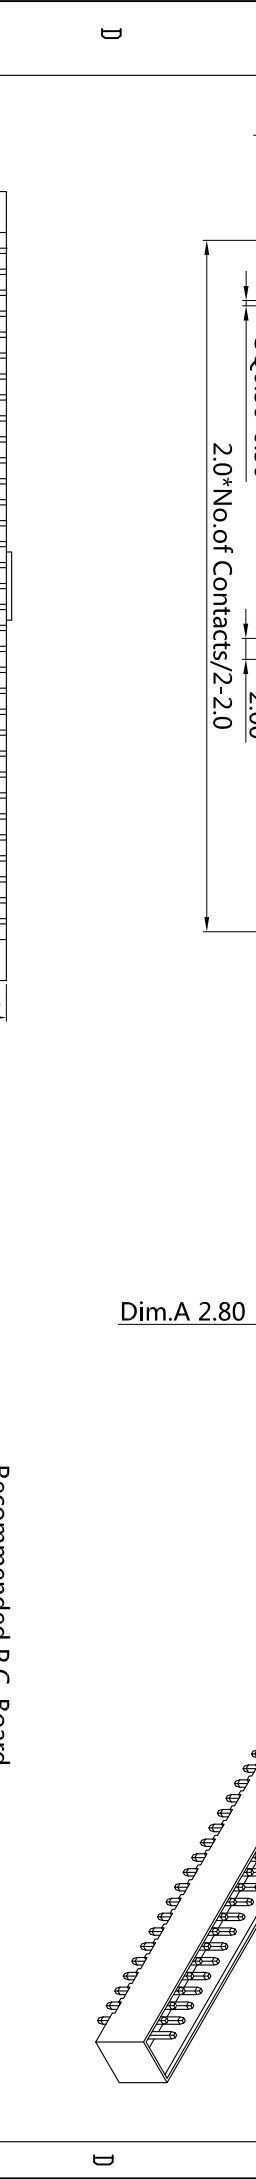
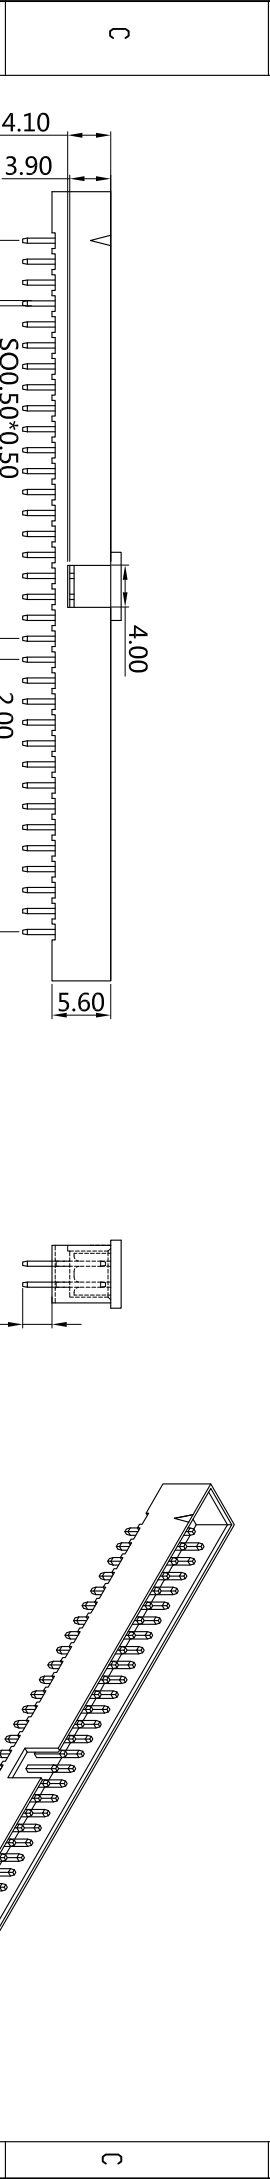


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

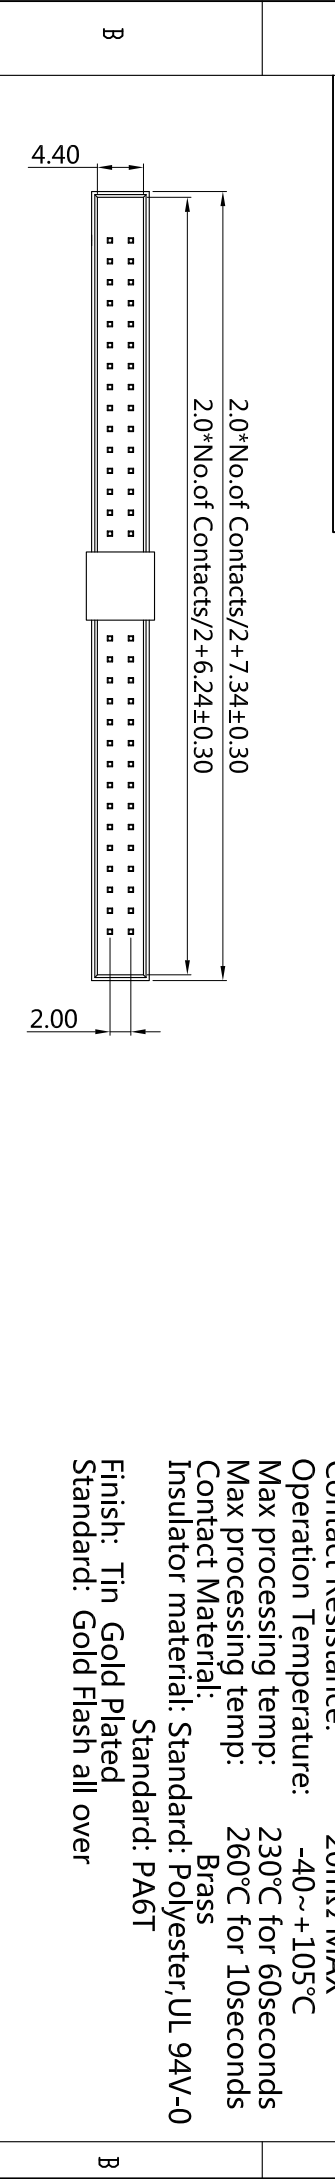

**(RoHS Compliant)**

**BH21 X - XX S0 BK X 000 E**

1. Insulator material: 5. Contact Plated:  
 N=PA6T T=Matte Tin over Nickel D=Gold 5μ"  
 L=LCP P=PA9T W=Matte Tin over nickel I=Gold 1μ"  
 Y=Bright Tin over Nickel G=Gold 10μ"  
 2. Circuits: 24PIN F=Gold Flash, Matte Tin 100μ"  
 3. Tail Style: A=Gold 3μ" J=Gold 10μ" , Matte Tin 100μ"  
 S0=Straight L=Gold 15μ"  
 4. Color: B=Gold 3μ" , Matte Tin 100μ"  
 BK=Black C=ordinary gold plating M=Gold 15μ" , Matte Tin 100μ"  
 D=Gold 5μ" U=Gold 30μ"  
 V=Gold 30μ" Matte Tin 100μ"

6.Special Options

7. Packing:  
 A=Bag B=Tube  
 C=Tray E=Cap+Reel

Recommended P.C. Board  
 SMD Layout

2.0\*No.of Contacts/2-2.0

东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

1: BH21P-XXBKHC4	PART NO.	BH21X-XXS0BKX000E	.X	.XX	.XXX
2: SQ0.50-8-00-X-C12	DRAWING NO	ZS-00013-J	±0.30	±0.20	±0.1
3:	DRAWN BY	Pan ChangWen	EDITION:A1	ITEM: BH21	SCALE:1:1
	APPROVAL BY	Chen xiao guang	2022-05-12	UNIT:M:M	

TEL:0769-85305015 FAX:0769-85845060

Current Rating: 2 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding: AC 500V  
 Contact Resistance: 20mΩ MAX  
 Operation Temperature: -40~+105°C  
 Max processing temp: 230°C for 60seconds  
 Max processing temp: 260°C for 10seconds  
 Contact Material: Brass  
 Insulator material: Standard: Polyester, UL 94V-0  
 Standard: PA6T  
 Finish: Tin Gold Plated  
 Standard: Gold Flash all over