

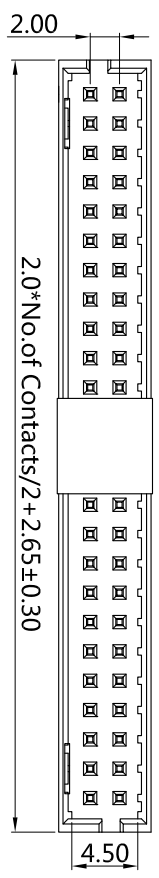
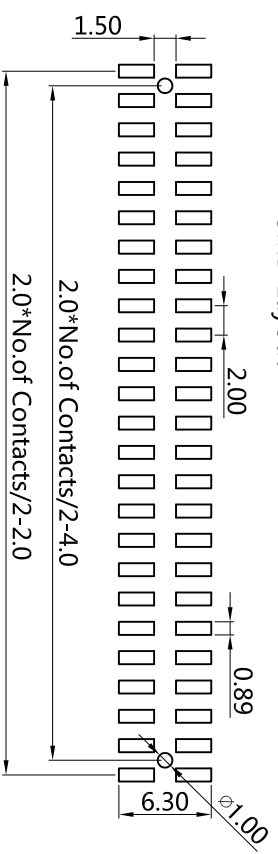
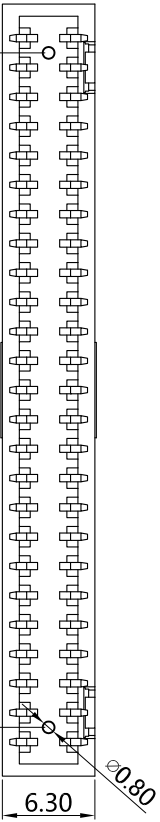


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

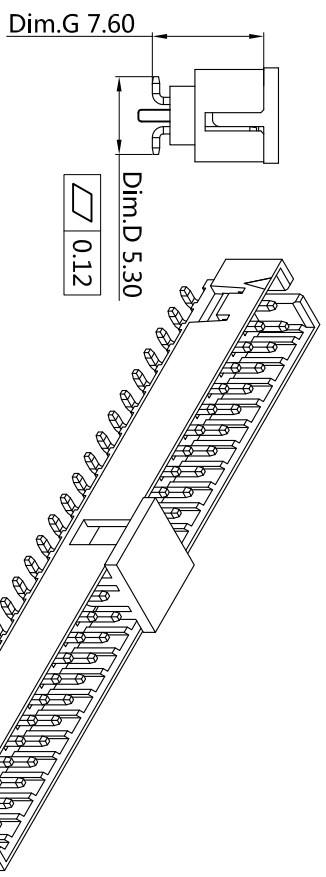

Current Rating: 2 Amps
Insulator Resistance: 1000 Megohms min
Contact Resistance: 20m ohms max.
Dielectric Withstanding: AC 500V
Operating Temperature: -40° ~ +105° C
Max Processing Temp: 230° C for 60 seconds
Contact Material: 260° C for 10 seconds
Insulator Material: Brass
Finish: Gold Plated Polyester, UL 94V-0
Standard: Gold Flash all over Nylon-6T

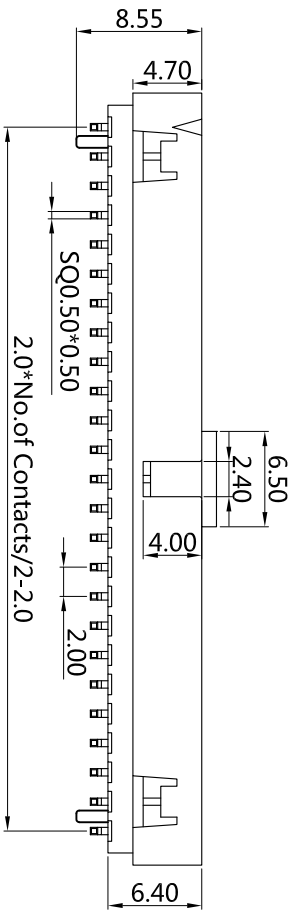

Recommended P.C. Board
 SMD Layout

1. Insulator Material
 N=PA6T
 L=LCP P=PA9T
 2. Circuits:06~50pin
3. Tail Style
 D1=SMT+Pillars
 4. Color:Bk.=Black

5. Contact Plated:
 T= Matte tin over nickel
 W= Matte tin over nickel 150µ" G=Gold 10µ"
 Y=Brighe tin over nickel
 J=Gold 10µ" NI 50µ"
 L=Gold 15 µ"
 M=Gold 15 µ" Ni 50 µ"
 U=Gold 30 µ"
 V=Gold 30 µ" Ni 50 µ"
 N=Gold flash, NI

6. Special Options
 7.Packing
 B=Tube
 C=Tray
 D=Box
 E=Cap+reel
 F=Cap+tray
 H=Cap+bag
 N=Tap&reel

BH22 X - XX D1 BK X 029 E
 1 2 3 4 5 6 7

1 **2** **3** **4** **5** **6** **7** **8**

东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD		PART NO.		BH22X-XXD1BKX029E		X ±0.30		XX ±0.20		XXX ±0.1	
BOM		1: BH22N-50BKH1C2		DRAWING NO		ZS-00122-J		EDITION: A1		ITEM: BH22	
TEL:0769-853505015 FAX:0769-85845060		2: SQ0.50-8-20-X-C12		DRAWN BY		Deng jin quan		2020-11-29		SCALE:1:1	
		3: H2N-CAP-H0-C4		APPROVAL BY		Chen xiao guang		2020-11-30		UNIT:M.M	