



**Current Rating:** 1 Amps  
**Insulator Resistance:** 1000 Megohms min  
**Contact Resistance:** 20m ohms max.  
**Dielectric Withstanding:** AC 500V  
**Operating Temperature:** -40° ~ +105° C  
**Max Processing Temp:** 230° C for 60 seconds  
**Contact Material:** 260° C for 10 seconds  
**Insulator Material:** Brass  
**Finish:** Gold Plated Polyester, UL 94V-0  
**Standard:** Gold Flash all over LCP

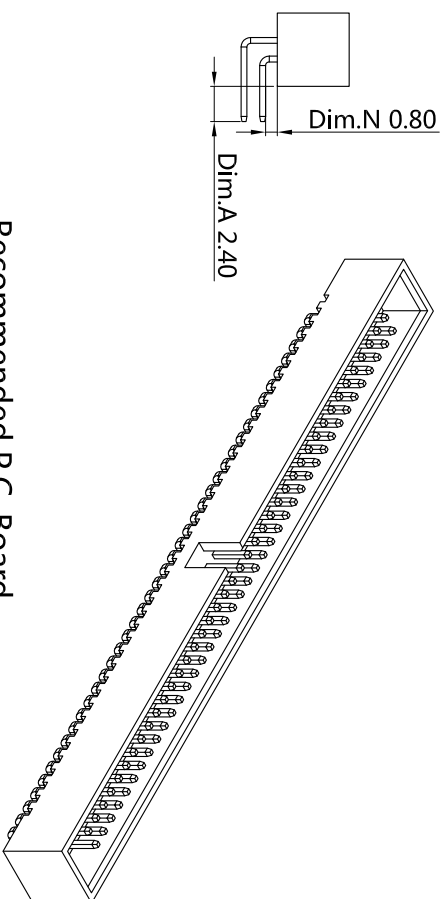

Recommended P.C. Board Hole Layout

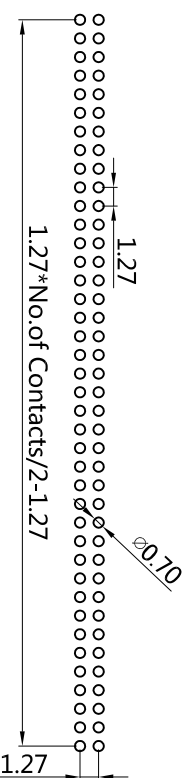

(RoHS Compliant)

**1. Insulator Material**

- N=PA6T
- L=LCP P=PA9T
- 2. Circuits: 10~60pin
- 3. Tail Style
- R0=Right angle
- 4. Color: BK=Black

**5. Contact Plated:**

- T= Matte tin over nickel
- W= Matte tin over nickel 150μ"
- Y=Brighe tin over nickel
- S= Gold Flash
- F= Gold flash, tin 50μ"
- C=Gold 0.8μ"
- I=Gold 1.0μ"

**6. Special Options**

- D=Gold 5μ"
- E=Gold 5μ", Ni 50μ"
- G=Gold 10μ"
- J=Gold 10μ", Ni 50μ"
- L=Gold 15 μ"
- M=Gold 15 μ", Ni 50 μ"
- U=Gold 30 μ"
- V=Gold 30 μ", Ni 50 μ"
- N=Gold flash ,NI
- 7. Packing
- B=Tube
- C=Tray
- D=Box
- E=Cap+reel
- F=Cap+tray
- G=Cap+tray
- H=Cap+bag
- N=Tap&reel

BH33 X - XX R0 BK X 000 X  
 1 2 3 4 5 6 7



东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1: BH33X-60BKHC4
	2: SQ0.4-9.5/12.0-X-C12
	3:

PART NO.	BH33X-XXR0BKX000X	X	.XX	.XXX
DRAWING NO	ZS-00006-J	±0.30	±0.20	±0.1
DRAWN BY	Deng jin quan	EDITION: A	2022-11-09	ITEM: BH33
APPROVAL BY	Chen xiao guang	2022-11-15	SCALE: 1:1	UNIT: M.M

TEL: 0769-85305015 FAX: 0769-85845060