

1	2	3	4	5	6	7	8
A							


**Current Rating:** 1 Amps  
**Insulator Resistance:** 1000 Megohms min  
**Contact Resistance:** 20m ohms max.  
**Dielectric Withstanding:** AC 500V  
**Operating Temperature:** -40° ~ +105° C  
**Max Processing Temp:** 230° C for 60 seconds  
**Contact Material:** 260° C for 10 seconds  
**Insulator Material:** Brass  
**Finish:** Gold Plated Polyester, UL 94V-0  
**Standard:** Gold Flash all over Standard: LCP

B							
---	--	--	--	--	--	--	--


C							
---	--	--	--	--	--	--	--

D							
---	--	--	--	--	--	--	--

E	<p>(RoHS Compliant)</p> <p>BH33 X - XX S0 BK X 000 X</p> <p>1/ 2/ 3/ 4/ 5/ 6/ 7/</p>						
F	<p>1. Insulator Material          N=PA6T          L=LCP P=PA9T          2. Circuits:10~60pin          3. Tail Style          S0=180°          4. Color: BK=Black</p> <p>5. Contact Plated:          T= Matte tin over nickel          W= Matte tin over nickel 150μ          Y=Brighe tin over nickel          S= Gold Flash          F= Gold flash, tin 50μ          C=Gold 0.8μ          I=Gold 1.0μ</p> <p>6. Special Options          7. Packing          B=Tube          C=Tray          D=Box          E=Cap+reel          F=Cap+tray          H=Cap+bag          N=Tap&amp;reel</p> <p>D=Gold 5μ          E=Gold 5μ, Ni 50μ          G=Gold 10μ          J=Gold 10μ, Ni 50μ          L=Gold 15 μ          M=Gold 15 μ, Ni 50 μ          U=Gold 30 μ          V=Gold 30 μ, Ni 50 μ          N=Gold flash, NI</p>						

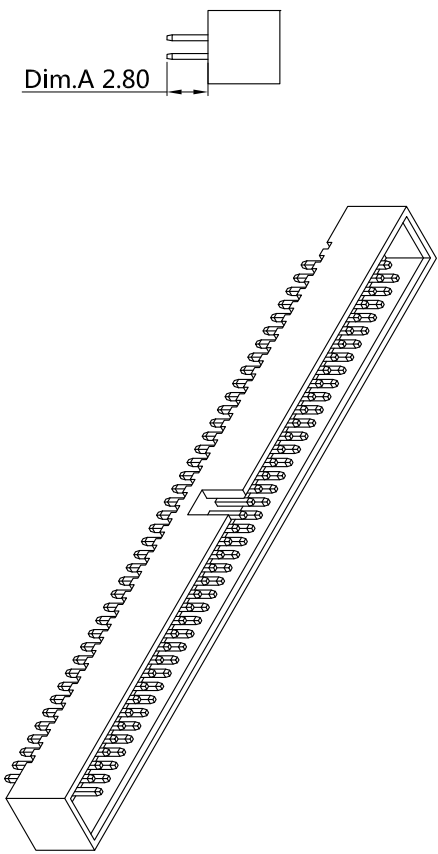

### Recommended P.C. Board Hole Layout

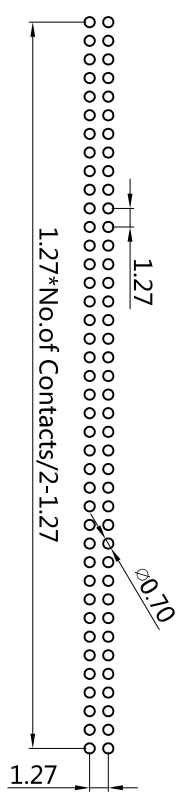

<p>东莞市震升电子有限公司 DONGGUAN ZHEN SHEN ELECTRONICS CO., LTD</p>		PART NO.		BH33X-XXS0BKX000X		.X .XX .XXX ±0.30 ±0.20 ±0.1	
BOM		DRAWING NO		ZS-00005-J		EDITION: A1	
3:		DRAWN BY		Deng jin quan		2022-11-09	
TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY		Chen xiao guang		2022-11-15	
						ITEM: BH33 SCALE:1:1 UNIT:M.M	