



**Current Rating:** 1 Amps  
**Insulator Resistance:** 1000 Megohms min  
**Contact Resistance:** 20m ohms max.  
**Dielectric Withstanding:** AC 500V  
**Operating Temperature:** -40° ~ +105° C  
**Max Processing Temp:** 230° C for 60 seconds  
**Contact Material:** 260° C for 10 seconds  
**Insulator Material:** Brass  
**Finish:** Gold Plated  
**Standard:** Nylon-6T  
**Standard:** Gold Flash all over

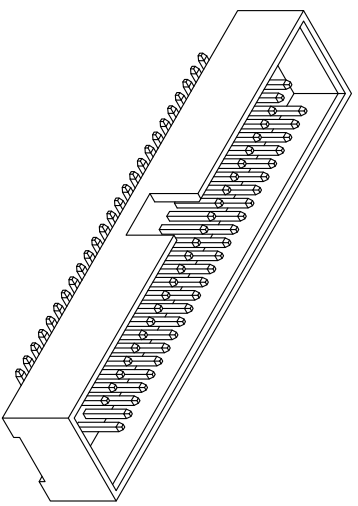

### Recommended P.C.B Hole Layout

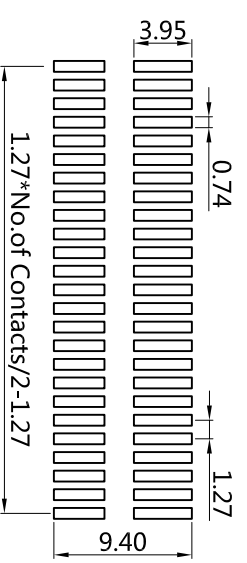

1. Insulator Material: N=Nylon-6T L=LCP P=PA9T		2. Circuits: 10~80 pin		3. Tail Style: D0=SMT		4. Color: BK=Black	
5. Contact Plated: T=Matte Tin over Nickel W=Matte Tin over Nickel 150u" Y=Brighe Tin over Nickel		F=Gold 15u" M=Gold 15u" ,Matte Tin 100u" U=Gold 30u" V=Gold 30u" ,Matte Tin 100u"		I=Gold 1u" F=Gold 5u" ,Matte Tin 100u" G=Gold 10u" J=Gold 10u" ,Matte Tin 100u"		7. Packing B=Tube C=Tray D=Box E=Cap+reel F=Cap+Tube G=Cap+Tray H=Cap+Bag	
(RoHS Compliant) <b>BH41 X - XX D0 BK X 000 X</b> <b>1 2 3 4 5 6 7</b>							
东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD		PART NO.		BH41X-XXD0BKX000X		X .XX .XXX ±0.30 ±0.20 ±0.1	
BOM		DRAWING NO		ZS-00148-J		EDITION: A1	
3:		DRAWN BY		Deng jin quan		2020-10-22	
TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY		Chen xiao guang		2022-11-15	
						UNIT:M.M	