
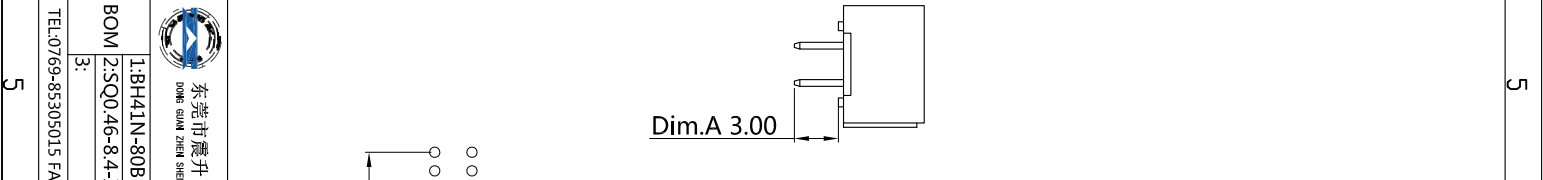
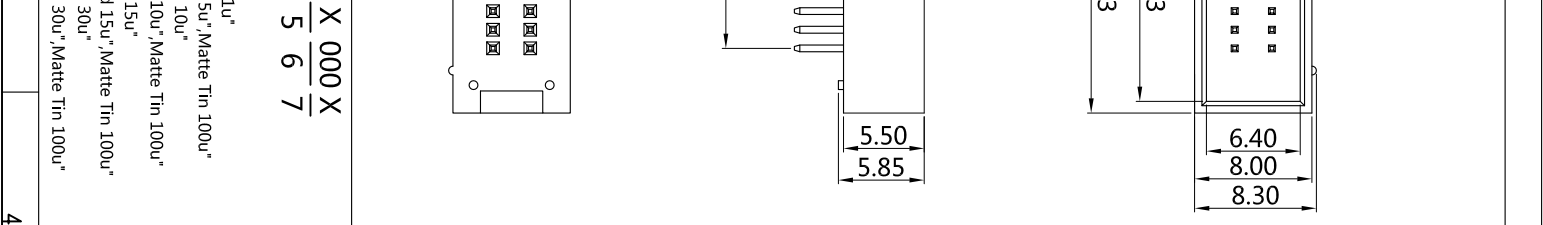
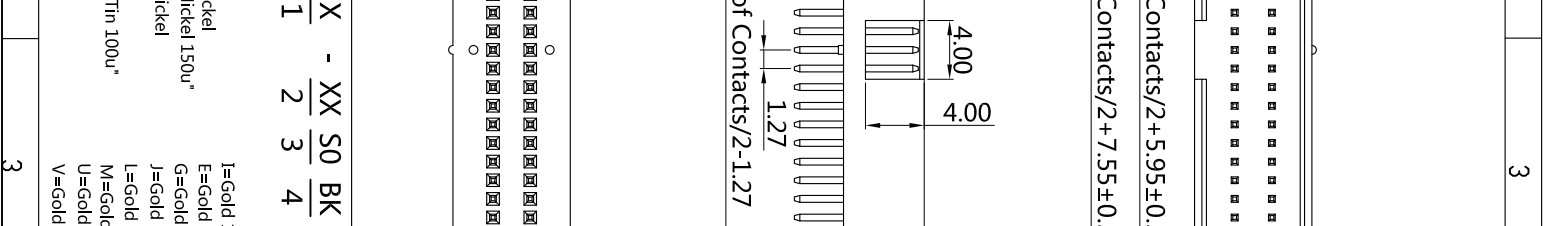


A

1
2
3
4
5
6
7
8

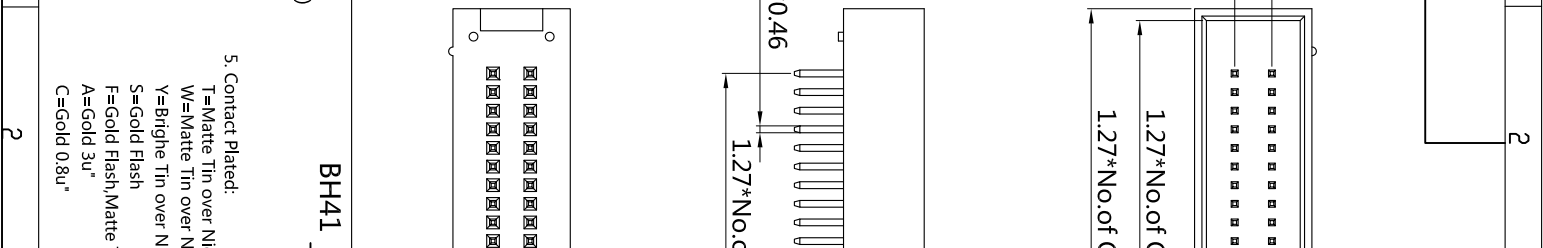

Recommended P.C.B Hole Layout

Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Contact Resistance: 20m ohms max.
 Dielectric Withstanding: AC 500V
 Operating Temperature: -40° ~ +105° C
 Max Processing Temp: 230° C for 60 seconds
 260° C for 10 seconds

Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Finish: Gold Plated
 Standard: Nylon-6T

Standard: Gold Flash all over

1. Insulator Material:
 N=Nylon-6T
 L=LCP P=PA9T
 2. Circuits: 10~80 pin
 3. Tail Style:
 S0=Straitght
 4. Color: BK=Black

5. Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over Nickel 150u"
 Y=Brighe Tin over Nickel
 S=Gold Flash
 F=Gold Flash,Matte Tin 100u"
 A=Gold 3u"
 C=Gold 0.8u"

6. Special Options
 7. Packing
 I=Gold 1u"
 F=Gold 5u",Matte Tin 100u"
 G=Gold 10u"
 J=Gold 10u",Matte Tin 100u"
 L=Gold 15u"
 M=Gold 15u",Matte Tin 100u"
 U=Gold 30u"
 V=Gold 30u",Matte Tin 100u"
 B=Tube
 C=Tray
 D=Box
 E=Cap+reel
 F=Cap+Tray
 G=Cap+Tray
 H=Cap+Bag

BH41 X - XX S0 BK X 000 X
 1 2 3 4 5 6 7

1 2 3 4 5 6 7 8

A A B C D E F

1 2 3 4 5 6 7 8

TEL:0769-85305015 FAX:0769-85845060

东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

1: BH41N-80BKH0C4	PART NO.	BH41X-XXS0BKX000X	X	.XX	.XXX
2: SQ0.46-8-4-X-C12	DRAWING NO	ZS-00106-J	±0.30	±0.20	±0.1
3:	DRAWN BY	Deng jin quan	EDITION: A1	ITEM: BH41	SCALE: 1:1
	APPROVAL BY	Chen xiao guang	2022-11-15	UNIT: M.M	