
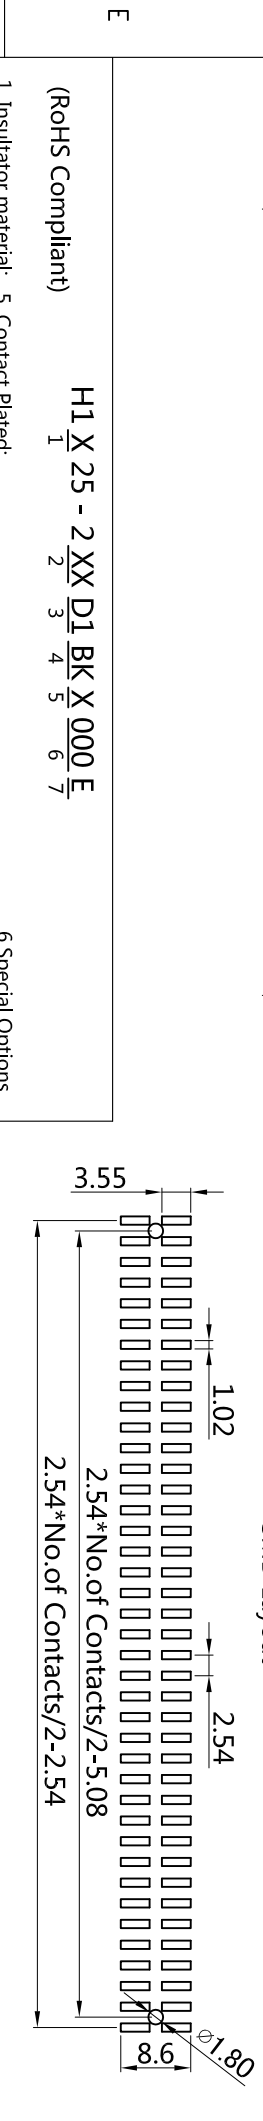
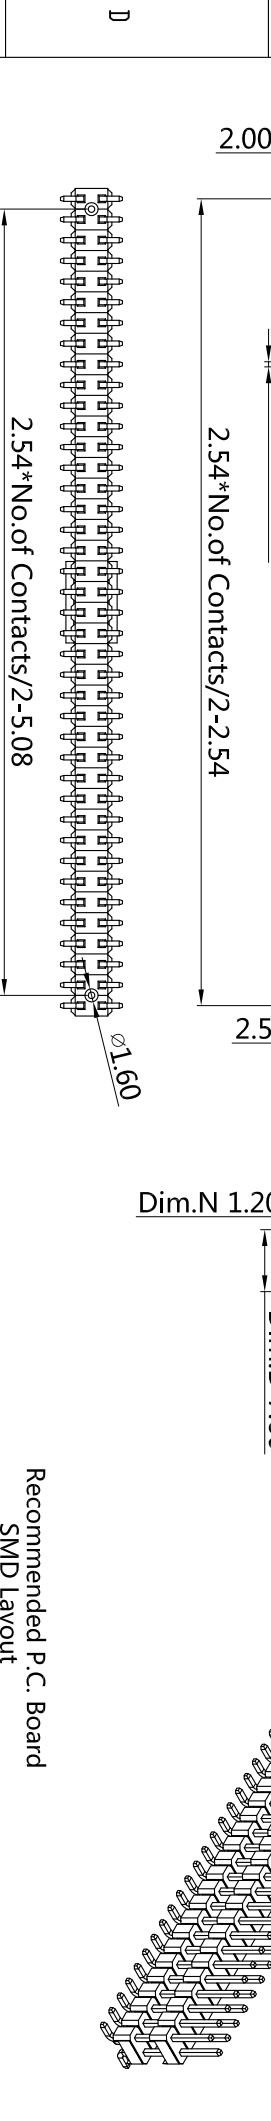
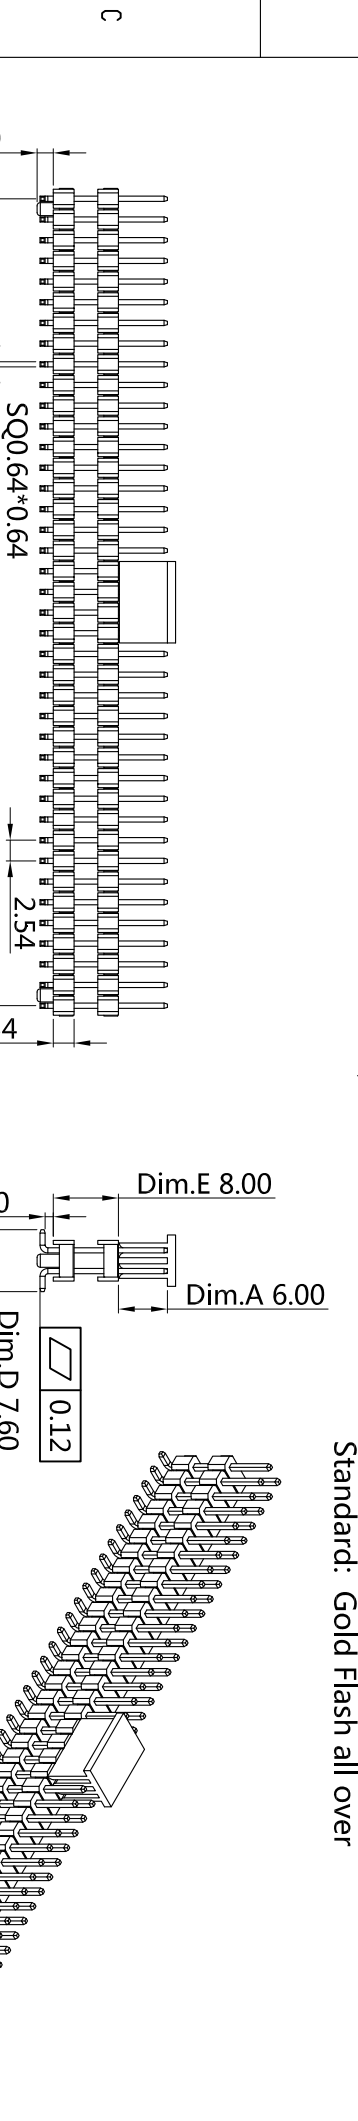


1	2	3	4	5	6	7	8
					<b>Current Rating:</b> 3 Amps <b>Insulator Resistance:</b> 1000 Megohms min <b>Dielectric Withstanding:</b> AC 500V <b>Contact Resistance:</b> 20mΩ MAX <b>Operation Temperature:</b> -40~+105°C <b>Max processing temp:</b> 230°C for 60seconds <b>Max processing temp:</b> 260°C for 10seconds <b>Contact Material:</b> Brass <b>Insulator material:</b> Standard: Polyester, UL 94V-0 <b>Standard:</b> PA6T		

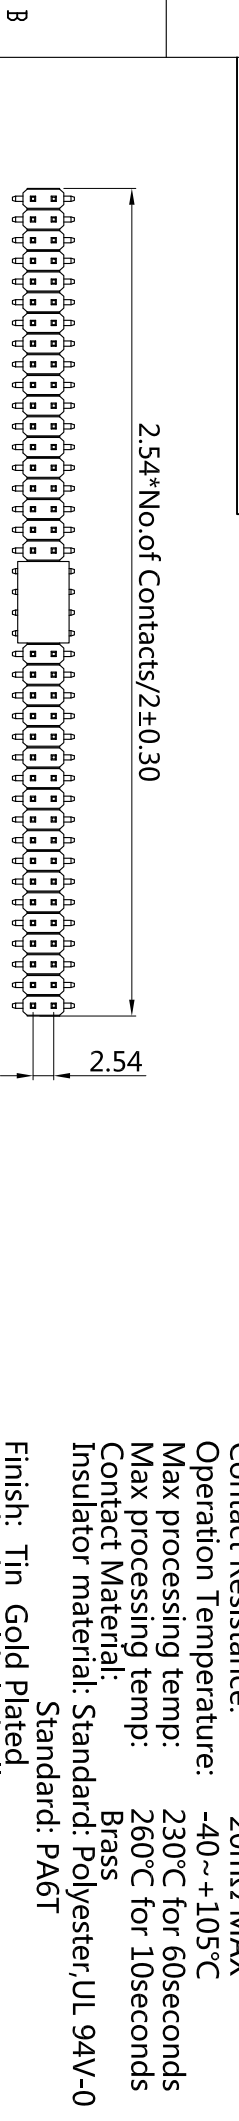

<b>1. Insulator material:</b> A=PBT N=PA6T L=LCP P=PA9T 2. Circuits:2-40 PIN 3. Tail Style: D1=SMT+Pillars 4. Color: BK=Black		<b>5. Contact Plated:</b> T=Matte Tin over Nickel W=Matte Tin over nickel 150μ" Y=Bright Tin over Nickel F=Gold Flash, Matte Tin 100μ" A=Gold 3μ" B=Gold 3μ" C = ordinary gold plating D= Gold 5μ"		<b>6.Special Options</b> I= Gold 1μ" E=Gold 5μ" G=Gold 10μ" J=Gold 10μ" L= Gold 15μ" M=Gold 15μ" U= Gold 30μ" V=Gold 30μ"		<b>7. Packing:</b> A=Bag B=Tube C=Tray E=Cap+Reel	
<b>(RoHS Compliant)</b> <b>H1 X 25 - 2 XX D1 BK X 000 E</b> 1 2 3 4 5 6 7				<b>Recommended P.C. Board SMD Layout</b>			
<b>1. Insulator material:</b> A=PBT N=PA6T L=LCP P=PA9T 2. Circuits:2-40 PIN 3. Tail Style: D1=SMT+Pillars 4. Color: BK=Black		<b>5. Contact Plated:</b> T=Matte Tin over Nickel W=Matte Tin over nickel 150μ" Y=Bright Tin over Nickel F=Gold Flash, Matte Tin 100μ" A=Gold 3μ" B=Gold 3μ" C = ordinary gold plating D= Gold 5μ"		<b>6.Special Options</b> I= Gold 1μ" E=Gold 5μ" G=Gold 10μ" J=Gold 10μ" L= Gold 15μ" M=Gold 15μ" U= Gold 30μ" V=Gold 30μ"		<b>7. Packing:</b> A=Bag B=Tube C=Tray E=Cap+Reel	
<b>(RoHS Compliant)</b> <b>H1 X 25 - 2 XX D1 BK X 000 E</b> 1 2 3 4 5 6 7				<b>Recommended P.C. Board SMD Layout</b>			

 东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD TEL:0769-853505015 FAX:0769-85845060		<b>PART NO.</b> H1X25-2XXD1BKX000E <b>DRAWING NO</b> ZS-00199-P <b>DRAWN BY</b> Deng jin quan <b>APPROVAL BY</b> Chen xiao guang		<b>.X</b> ±0.30 <b>.XX</b> ±0.20 <b>.XXX</b> ±0.1 <b>ITEM:</b> H1 <b>SCALE:</b> 1:1 <b>UNIT:</b> M:M	
--	--	---	--	---	--