

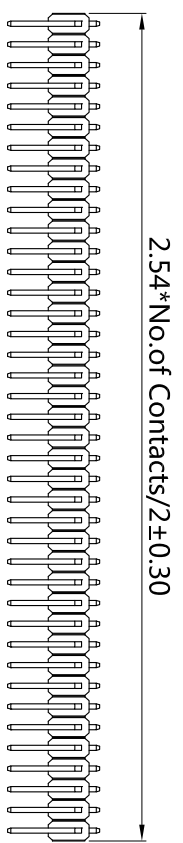
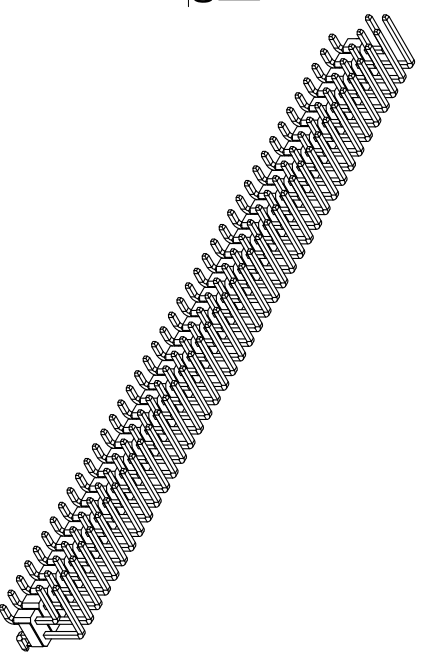
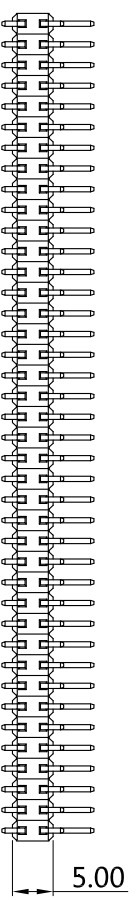


1 2 3 4 5 6 7 8


A

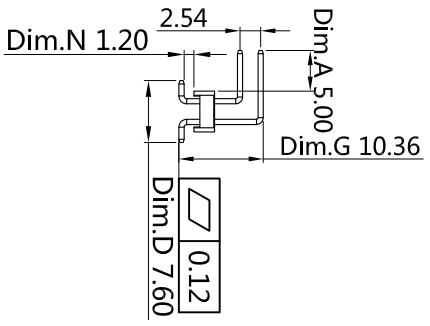

Current Rating: 3 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: 500V AC
 Contact Resistance: 20mΩ MAX
 Operation Temperature: -40~+105°C
 Max processing temp: 230°C for 60seconds
 Max processing temp: 260°C for 10seconds
 Contact Material: Brass
 Insulator material: Polyester UL 94V-0
 Standard: PA6T
 Finish: Tin, Gold Plated
 Standard: Gold Flash all over

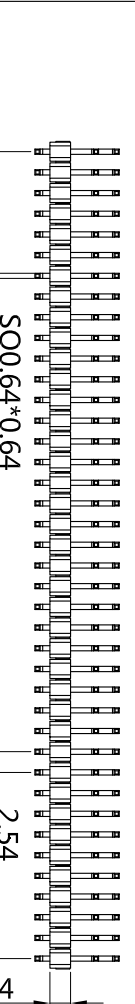

Recommended P.C. Board
 SMT Layout

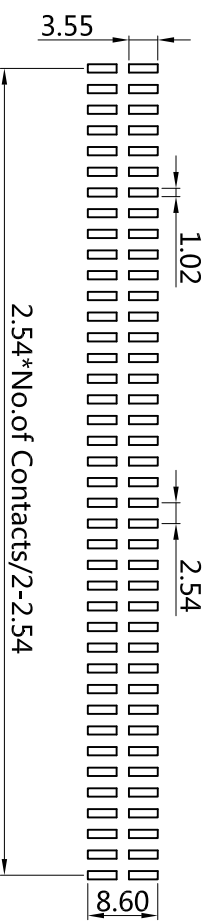

(RoHS Compliant)
 H1 X25- 2 XX RD BK X 000 X
 1 2 3 4 5 6 7

1. Insulator materials: Contact Plated:
 N=PA6T
 L=LCP P=PA9T
 2. Circuits:02-40PIN
 3. Tail Style:
 RD=90°+SMT
 4. Color:
 BK=Black

T=Matte Tin over Nickel
 W=Matte Tin over nickel 150μ"
 Y=Bright Tin over Nickel
 S= Gold flash
 F= Gold Flash, Matte Tin 100μ"
 A=Gold 3μ"
 C=Gold 0.8μ"
 I= Gold 1μ"

E=Gold 5μ", Matte Tin 100μ"
 G=Gold 10μ"
 J=Gold 10μ", Matte Tin 100μ"
 L= Gold 15μ"
 M=Gold 15μ", Matte Tin 100μ"
 U= Gold 30μ"
 V=Gold 30μ", Matte Tin 100μ"

7. Packing:
 A=Bag
 B=Tube
 C=Tray

<p>东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD</p>		PART NO.		H1X25-2XXRDBKX000X		.X		.XX		.XXX	
BOM		DRAWING NO		ZS-10366-P		EDITION: A1		SCALE:1.1		ITEM: H1	
1:HX25-240BKHOCL		DRAWN BY		Deng jin quan		2020-6-24		SCALE:1.1		UNIT:M.M	
2:SQ0.64-12.5/17.5-X-C12		APPROVAL BY		Chen xiao guang		2020-6-24					
3:											
TEL:0769-85305015 FAX:0769-85845060											