
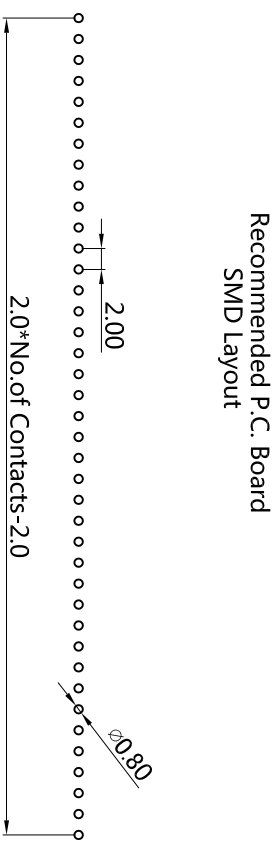
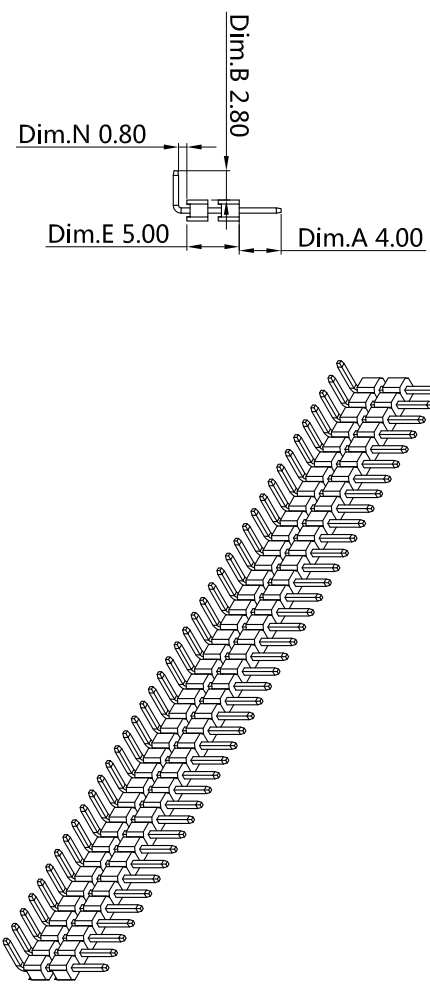
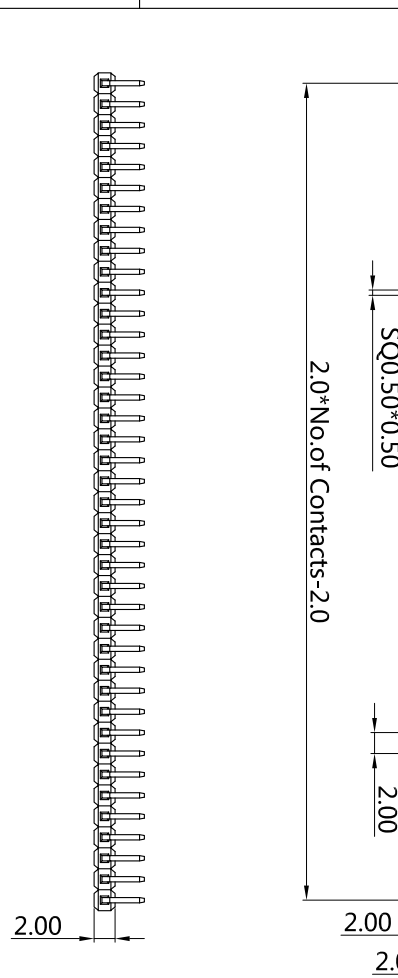
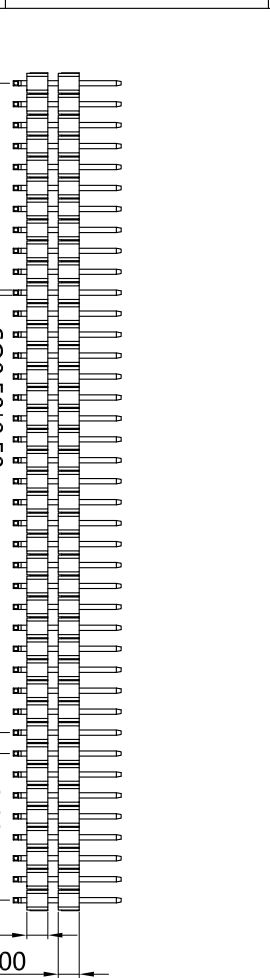
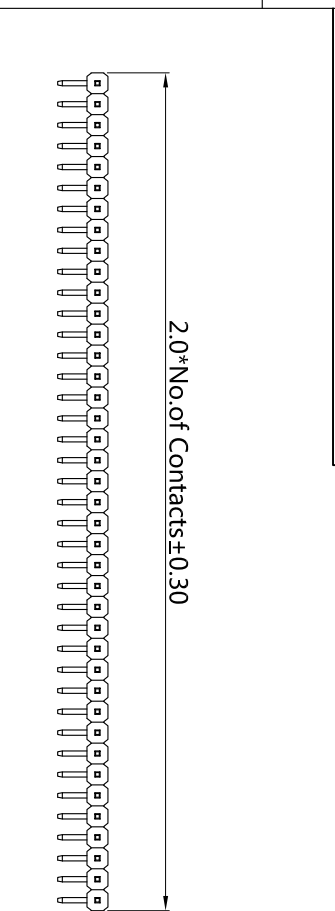


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---



(RoHS Compliant)

H2 X 20 - 1 XX R0 BK X D00 X

1. Insulator material: 5. Contact Plated:

N=PA6T L=LCP P=PA9T
2. Circuits:2-40 PIN
3. Tail Style:
R0=Right angle
4. Color:
BK=Black

T=Matte Tin over Nickel
W=Matte Tin over nickel 150μ"
Y=Bright Tin over Nickel
F=Gold Flash, Matte Tin 100μ"
A=Gold 3μ"
B=Gold 3μ"
C = ordinary gold plating
D= Gold 5μ"

I= Gold 1μ"
E=Gold 5μ"
G=Gold 10μ"
J=Gold 10μ"
L= Gold 15μ"
M=Gold 15μ"
U= Gold 30μ"
V=Gold 30μ"

6.Special Options

7. Packing:
A=Bag
B=Tube
D=Small box
E=Cap+Reel

<p>东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD</p>		PART NO.		H2X20-1XXR0BKXD00X		.X		.XX		.XXX	
BOM 1:1H2N20-140BKHOCL		DRAWING NO		ZS-00101-P		EDITION:A1		ITEM: H2		SCALE:1:1	
3:		DRAWN BY		Deng jin quan		2021-12-25		UNIT:M:M			
TEL:0769-85305015 FAX:0769-85845060		APPROVAL BY		Chen xiao guang		2021-12-27					

F	E	D	C	B	A
---	---	---	---	---	---