


Current Rating: 2 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 500V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass
Insulator material: Standard: Polyester, UL 94V-0
Standard: PA6T
Finish: Tin Gold Plated
Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

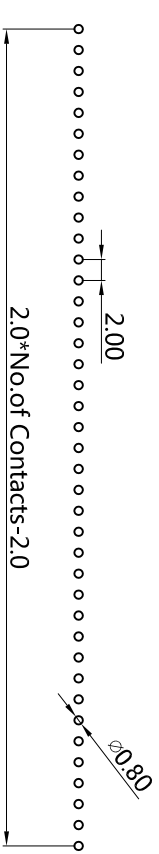

H2 X 20 - 1 XX S0 BK X D41 X
 1 2 3 4 5 6 7

1. Insulator material: 5. Contact Plated:
- N=PA6T T=Matte Tin over Nickel
 - L=LCP P=PA9T W=Matte Tin over nickel 150μ"
 - 2. Circuits:2-40 PIN Y=Bright Tin over Nickel
 - 3. Tail Style: F= Gold Flash, Matte Tin 100μ"
 - S0=180° A=Gold 3μ"
 - 4. Color: B=Gold 3μ", Matte Tin 100μ"
 - BK=Black C = ordinary gold plating
 - D = Gold 5μ"
- 6.Special Options
- I= Gold 1μ"
 - E=Gold 5μ", Matte Tin 100μ"
 - J=Gold 10μ", Matte Tin 100μ"
 - L = Gold 15μ"
 - M=Gold 15μ", Matte Tin 100μ"
 - V=Gold 30μ" Matte Tin 100μ"
7. Packing:
- A=Bag
 - B=Tube
 - D=Small box
 - E=Cap+Reel

		东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD	
BOM 1:	H2X20-140BKHOCL	PART NO.	H2X20-1XXS0BKXD41X
BOM 2:	SQ0.5-21.0-X-C12	DRAWING NO	ZS-10279-P
BOM 3:		DRAWN BY	Deng jin quan
		APPROVAL BY	Chen xiao guang
		EDITION:A1	2021-12-25
		SCALE:1:1	2021-12-27
		UNIT:M:M	
TEL:0769-85305015 FAX:0769-85845060			

1. Insulator material:
 N=PA6T
 L=LCP P=PA9T
 2. Circuits:2-40 PIN
 3. Tail Style:
 S0=180°
 4. Color:
 BK=Black

5. Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over nickel 150μ"
 Y=Bright Tin over Nickel
 F= Gold Flash, Matte Tin 100μ"
 A=Gold 3μ"
 B=Gold 3μ", Matte Tin 100μ"
 C = ordinary gold plating
 D = Gold 5μ"

6.Special Options
 I= Gold 1μ"
 E=Gold 5μ", Matte Tin 100μ"
 J=Gold 10μ", Matte Tin 100μ"
 L = Gold 15μ"
 M=Gold 15μ", Matte Tin 100μ"
 V=Gold 30μ" Matte Tin 100μ"

7. Packing:
 A=Bag
 B=Tube
 D=Small box
 E=Cap+Reel