
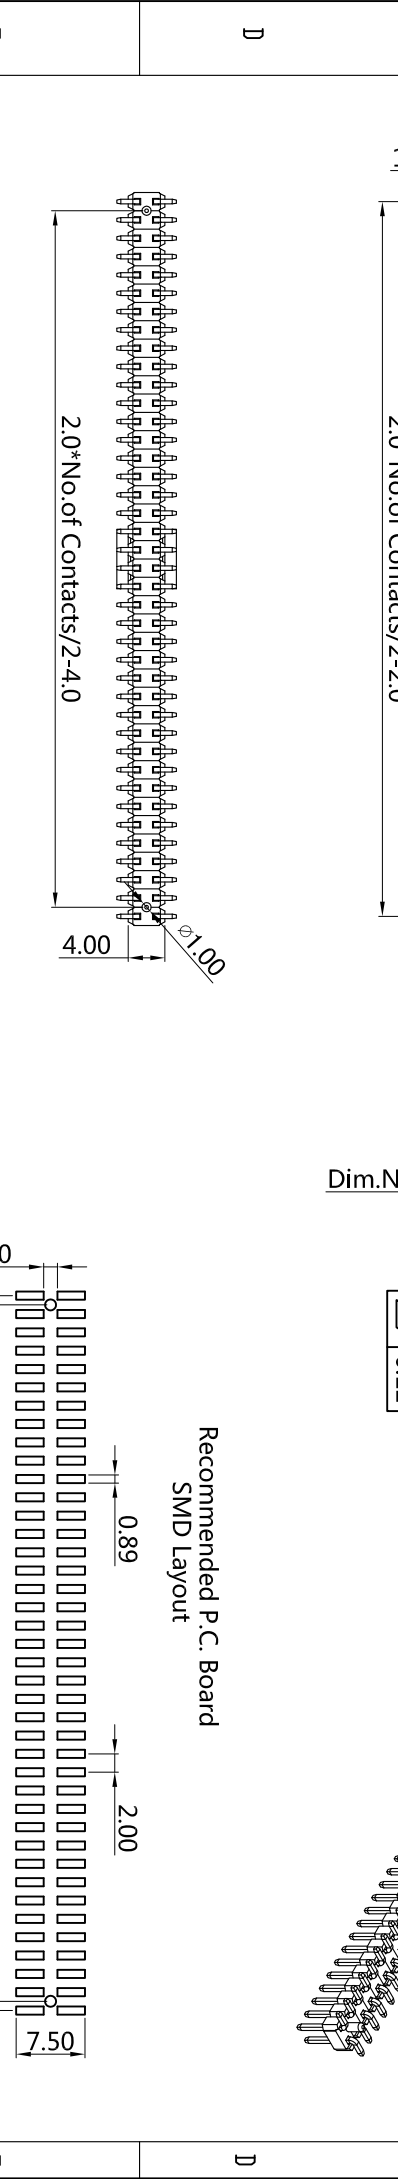
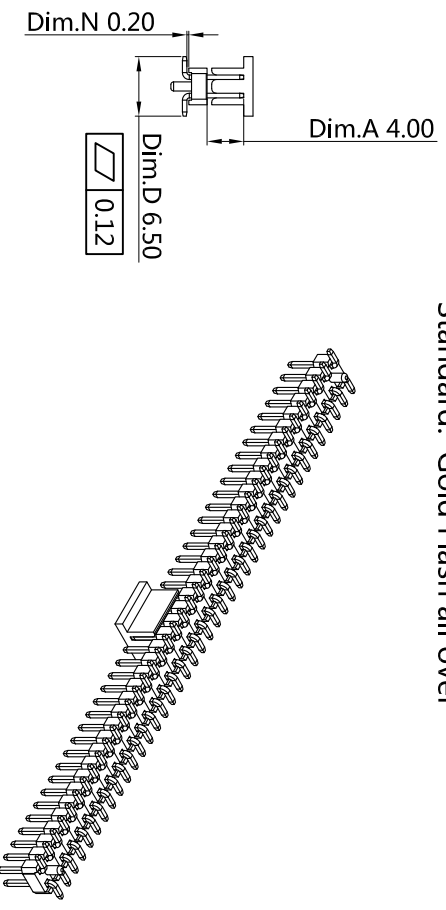
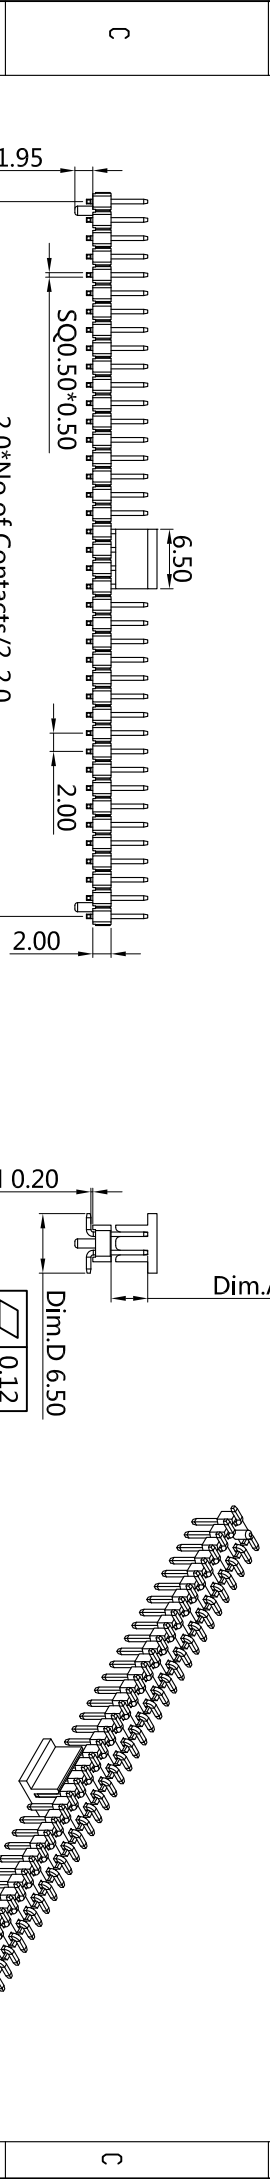


1	2	3	4	5	6	7	8
					<b>Current Rating: 2 Amps</b> <b>Insulator Resistance: 1000 Megohms min</b> <b>Dielectric Withstanding: AC 500V</b> <b>Contact Resistance: 20mΩ MAX</b> <b>Operation Temperature: -40~+105°C</b> <b>Max processing temp: 230°C for 60seconds</b> <b>Max processing temp: 260°C for 10seconds</b> <b>Contact Material: Brass</b> <b>Insulator material: Standard: Polyester, UL 94V-0</b> <b>Standard: PA6T</b>		

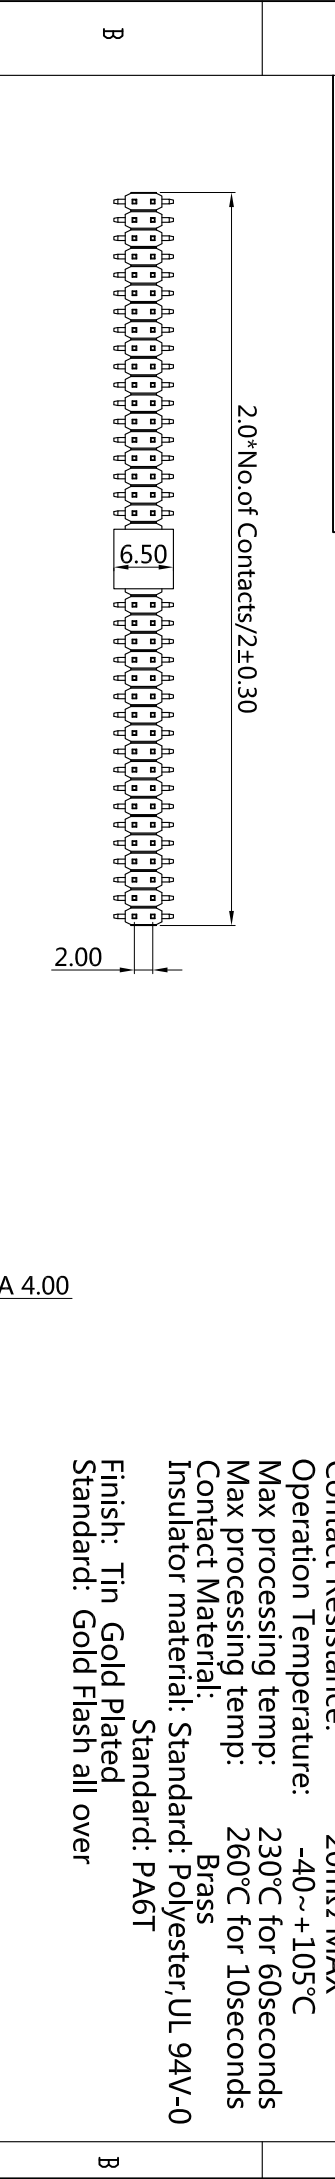

**(RoHS Compliant)**

**H2 X 20 - 2 XX D1 BK X 042 X**

1. Insulator material: 5. Contact Plated:

N=PA6T T=Matte Tin over Nickel I=Gold 1μ"  
L=LCP P=PA9T W=Matte Tin over nickel 150μ" E=Gold 5μ"  
Y=Circuits:3-40 PIN V=Bright Tin over Nickel G=Gold 10μ"  
3. Taill Style: F=Gold Flash, Matte Tin 100μ" J=Gold 10μ"  
D1=SMIT + Pillars A=Gold 3μ" L=Gold 15μ"  
4. Color: B=Gold 3μ" M=Gold 15μ" U=Gold 15μ"  
BK=Black D=Gold 5μ" V=Gold 30μ"

6.Special Options

7. Packing:  
A=Bag B=Tube C=Tray E=Cap+Reel

<p>东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD</p>		PART NO.		H2X20-2XXD1BKX042X		.X		.XX		.XXX	
BOM		DRAWING NO		ZS-10267-P		±0.30		±0.20		±0.1	
TEL:0769-85305015 FAX:0769-85845060		DRAWN BY		Deng Jin Quan		2021-12-09		SCALE:1:1		UNIT:M.M	
		APPROVAL BY		Chen xiao guang		2021-12-27					