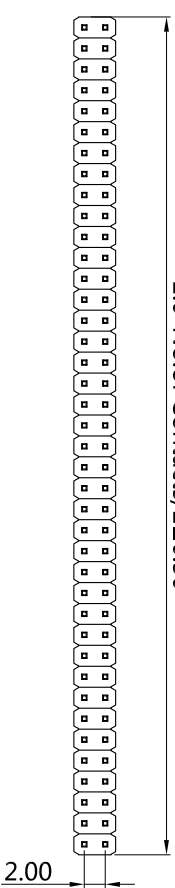
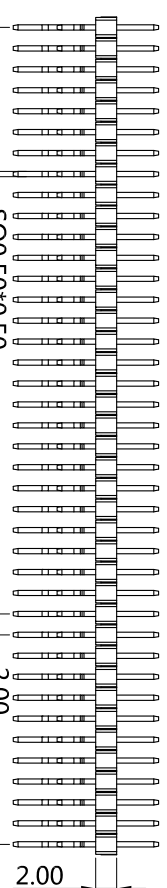



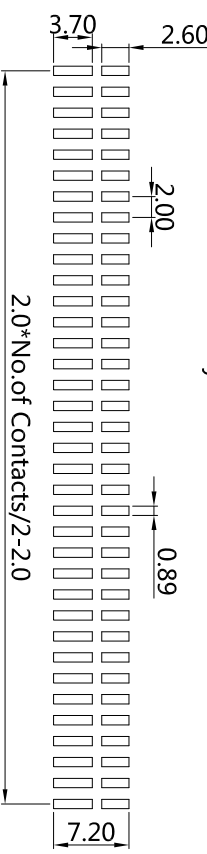
A								A
---	--	--	--	--	--	--	--	---

B	<p>2.0*No.of Contacts/2±0.30</p> 							B
---	---	--	--	--	--	--	--	---


C								C
---	--	--	--	--	--	--	--	---


D								D
---	--	--	--	--	--	--	--	---

E	<p>(RoHS Compliant)</p> <p>H2 X 20 - 2 XX DS BK X 030 X</p> <p>1. Insulator material: 5. Contact Plated:</p> <p>N=PA6T T=Matte Tin over Nickel I=Gold 1µ" E=Gold 5µ" Matte Tin 100µ"</p> <p>L=LCP P=PA9T W=Matte Tin over nickel 150µ" G=Gold 5µ" E=Gold 10µ"</p> <p>2. Circuits:2-40 PIN Y=Bright Tin over Nickel F=Gold Flash, Matte Tin 100µ" J=Gold 10µ" Matte Tin 100µ"</p> <p>3. Tail Style: A=Gold 3µ" L=Gold 15µ" M=Gold 15µ" Matte Tin 100µ"</p> <p>4. Color: D=Gold 5µ" U=Gold 30µ" V=Gold 30µ" Matte Tin 100µ"</p> <p>6.Special Options</p> <p>7. Packing: A=Bag B=Tube D=Small box E=Cap+Reel</p>							E
---	--	--	--	--	--	--	--	---

F	 <p>Recommended P.C. Board SMD Layout</p>							F
---	--	--	--	--	--	--	--	---

<p>Current Rating: 2 Amps</p> <p>Insulator Resistance: 1000 Megohms min</p> <p>Dielectric Withstanding: AC 500V</p> <p>Contact Resistance: 20mΩ MAX</p> <p>Operation Temperature: -40~+105°C</p> <p>Max processing temp: 230°C for 60seconds</p> <p>Max processing temp: 260°C for 10seconds</p> <p>Contact Material: Brass</p> <p>Insulator material: Standard: Polyester, UL 94V-0</p> <p>Standard: PA6T</p> <p>Finish: Tin Gold Plated</p> <p>Standard: Gold Flash all over</p>	
--	--

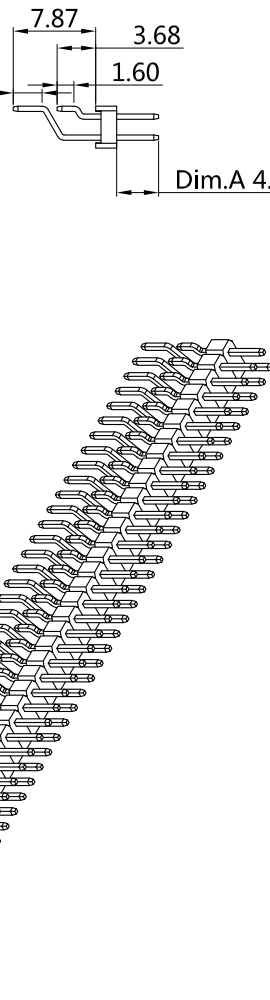

 <p>东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD</p>		<p>PART NO. H2X20-2XXDSBKX030X</p> <p>DRAWING NO. ZS-00105-P</p> <p>DRAWN BY Deng jin quan</p> <p>APPROVAL BY Chen xiao guang</p>		<p>X ±0.30</p> <p>.XX ±0.20</p> <p>.XXX ±0.1</p>	
<p>BOM 1: H2N20-140BKHOCl</p> <p>2: SQ0.5-9/15.2-X-C12</p> <p>3:</p>		<p>EDITION: A1</p> <p>2021-12-25</p> <p>2021-12-27</p>		<p>ITEM: H2</p> <p>SCALE: 1:1</p> <p>UNIT: M.M</p>	
<p>TEL: 0769-85305015 FAX: 0769-85845060</p>					