

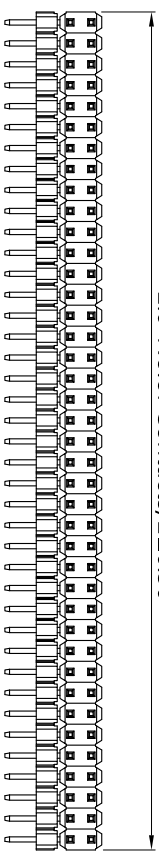
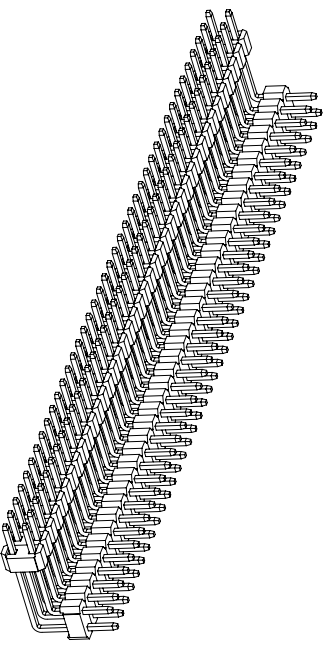



2.0\*No.of Contacts/2±0.30

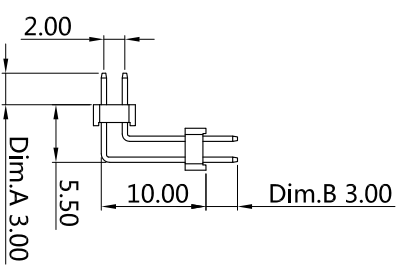


2.0\*No.of Contacts/2-2.0

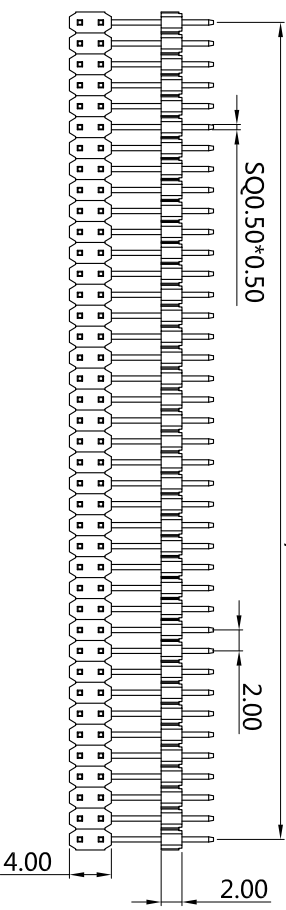

Current Rating: 2 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding: AC 500V  
 Contact Resistance: 20mΩ MAX  
 Operation Temperature: -40~+105°C  
 Max processing temp: 230°C for 60seconds  
 Max processing temp: 260°C for 10seconds  
 Contact Material: Brass  
 Insulator material: Standard: Polyester,UL 94V-0  
 Standard: PA6T  
 Finish: Tin Gold Plated  
 Standard: Gold Flash all over



Recommended P.C. Board  
 SMD Layout

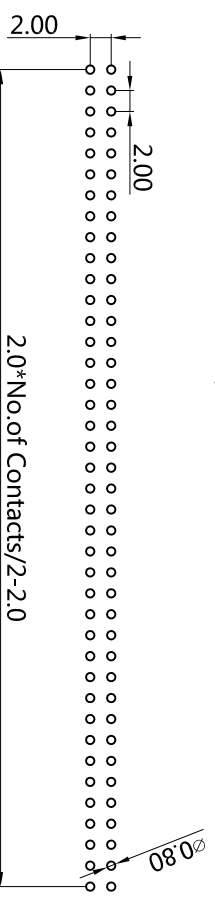

H2 X 20 - 2 XX R0 BK X D39 X

1. Insulator material: N=PA6T  
 L=LCP P=PA9T  
 Circuits:2-40 PIN  
 Tail Style:  
 R0=Right angle  
 Color:  
 BK=Black

5. Contact Plated:

T=Matte Tin over Nickel  
 W=Matte Tin over nickel 150μ"  
 Y=Bright Tin over Nickel  
 F=Gold Flash, Matte Tin 100μ"  
 A=Gold 3μ"  
 B=Gold 3μ"  
 C = ordinary gold plating  
 D= Gold 5μ"

I= Gold 1μ"  
 E=Gold 5μ"  
 G=Gold 10μ"  
 J=Gold 10μ"  
 L = Gold 15μ"  
 M=Gold 15μ"  
 U = Gold 30μ"  
 V=Gold 30μ"

6.Special Options

7. Packing:

A=Bag  
 B=Tube  
 D=Small box  
 E=Cap+Reel



东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:HZN20-140BKHC1	PART NO.	H2X20-2XXR0BKXD39X
3:	2:SQ0.5-16/7/20.7-X-C12	DRAWING NO	ZS-10210-P
		DRAWN BY	Deng Jin Quan
		APPROVAL BY	

			X	.XX	.XXX
			±0.30	±0.20	±0.1
		EDITION:	ITEM: H2		
			SCALE:1:1		
			UNIT:M.M		

TEL:0769-85305015 FAX:0769-85845060