


Current Rating: 1 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: AC 300V
 Contact Resistance: 20mΩ MAX
 Operation Temperature: -40~+105°C
 Max processing temp: 230°C for 60seconds
 Max processing temp: 260°C for 10seconds
 Contact Material: Brass
 Insulator material: Standard: Polyester,UL 94V-0
 Standard: PA6T
 Finish: Tin Gold Plated
 Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

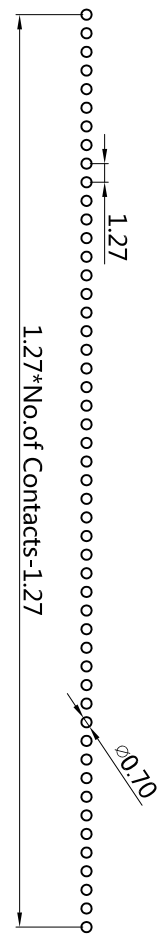

H3 X 15 - 1 XX R0 BK X D00 X


1 2 3 4 5 6 7

1. Insulator material: 5. Contact Plated:

- N=PA6T T=Matte Tin over Nickel I=Gold 1μ"
 L=LCP P=PA9T W=Matte Tin over nickel 150μ" E=Gold 5μ"
 2. Circuits:2-50 PIN Y=Bright Tin over Nickel G=Gold 10μ"
 3. Tail Style: F=Gold Flash, Matte Tin 100μ" J=Gold 10μ"
 R0=Right angle A=Gold 3μ" L=Gold 10μ"
 4. Color: B=Gold 3μ" M=Gold 15μ" U=Gold 15μ"
 BK=Black D=Gold 5μ" V=Gold 30μ"

6.Special Options

7. Packing:
 A=Bag B=Tube
 D=Small box E=Cap+Reel



BOM	1:H3N15-150BKHOCL
3:	2:SQ0.4-12.2-X-C12

PART NO.	H3X15-1XXR0BKXD00X	X	.XX	.XXX
DRAWING NO	ZS-00035-P	±0.30	±0.20	±0.1
DRAWN BY	Deng jin quan	EDITION:A1	ITEM: H3	SCALE:1:1
APPROVAL BY	Chen xiao guang	2021-12-25	2021-12-27	UNIT:M:M