


Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 300V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass
Insulator material: Standard: Polyester, UL 94V-0
Standard: PA6T
Finish: Tin Gold Plated
Standard: Gold Flash all over

Recommended P.C. Board
 SMD Layout

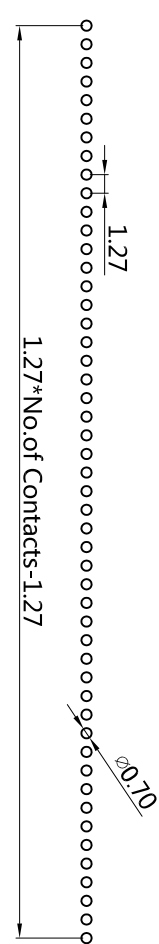

H3 X 20 - 1 XX S0 BK X D00 X
 1 2 3 4 5 6 7

1. Insulator material: 5. Contact Plated:
- N=PA6T T=Matte Tin over Nickel
 - L=LCP P=PA9T W=Matte Tin over nickel 150μ"
 - 2. Circuits:2-50 PIN Y=Bright Tin over Nickel
 - 3. Tail Style: F=Gold Flash, Matte Tin 100μ"
 - 4. Color: S0=180° A=Gold 3μ" J=Gold 10μ" L=Gold 15μ"
 - BK=Black D=Gold 5μ" V=Gold 30μ" Matte Tin 100μ"
- 6.Special Options
7. Packing:
- I=Gold 1μ"
 - E=Gold 5μ"
 - Matte Tin 100μ"
 - G=Gold 10μ"
 - A=Bag
 - J=Gold 10μ"
 - Matte Tin 100μ"
 - L=Gold 15μ"
 - M=Gold 15μ"
 - Matte Tin 100μ"
 - U=Gold 30μ"
 - D=Small box
 - V=Gold 30μ"
 - Matte Tin 100μ"
 - E=Cap+Reel

<p>东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD</p>		PART NO.		H3X20-1XXS0BKXD00X		.X		.XX		.XXX	
BOM		DRAWING NO		ZS-00043-P		EDITION:A1		ITEM: H3		SCALE:1:1	
1:H3N20-150BKHC4		DRAWN BY		Deng jin quan		2021-12-25		UNIT:M:M			
2:S0Q.4-11.4-X-C12		APPROVAL BY		Chen xiao guang		2021-12-27					
3:											
TEL:0769-85305015 FAX:0769-85845060											