

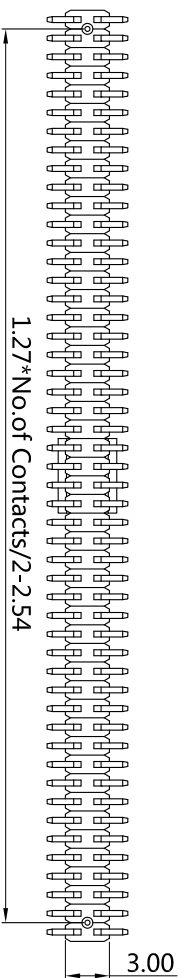
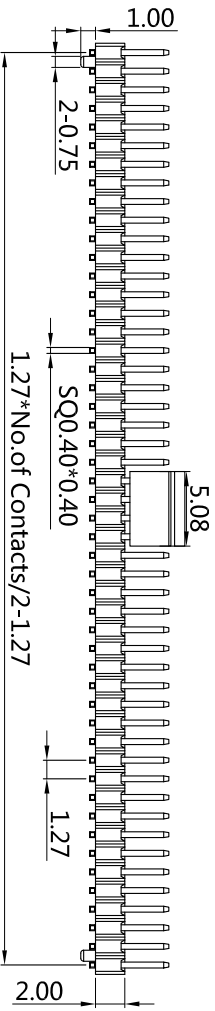
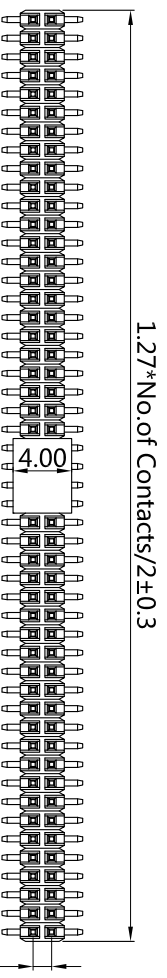


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

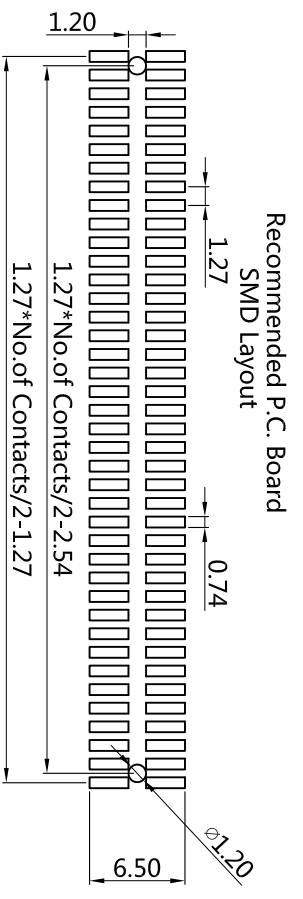

Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 300V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass
Insulator material: Standard: Polyester, UL 94V-0
Standard: PA6T
Finish: Tin Gold Plated
Standard: Gold Flash all over

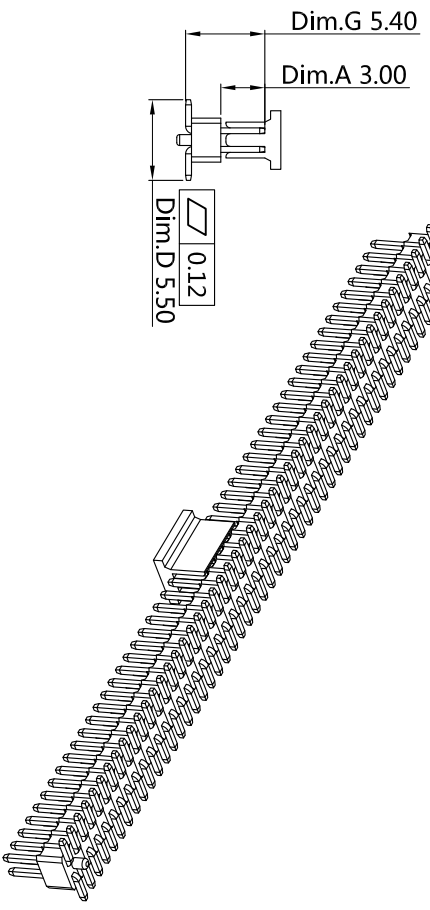


H3 X 20 - 2 XX D1 BK X D00 E
 1 2 3 4 5 6 7

1. Insulator material: 5. Contact Plated:
 N=PA6T T=Matte Tin over Nickel I=Gold 1μ"
 L=LCP P=PA9T W=Matte Tin over nickel 150μ" E=Gold 5μ"
 Y=Circuits:2-50 PIN V=Bright Tin over Nickel G=Gold 10μ"
 3. Tail Style: F=Gold Flash, Matte Tin 100μ" J=Gold 10μ"
 D1=SMT +Pillars A=Gold 3μ" L=Gold 15μ"
 4. Color: B=Gold 3μ" M=Gold 15μ" U=Gold 30μ"
 BK=Black D=Gold 5μ" V=Gold 30μ"

6.Special Options

7. Packing:

A=Bag B=Tube
 D=Small box E=Cap+Reel



东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:H3N20-250BKHC4	DRAWING NO	ZS-00217-P	EDITION:A1	ITEM: H3
	2:SQ0.4-7.1-X-C12	DRAWN BY	Deng jin quan	2021-12-25	SCALE:1:1
	3:H3N-CAP-H0-C4	APPROVAL BY	Chen xiao guang	2021-12-27	UNIT:M.M

PART NO.	H3X20-2XXD1BKX000E	.X	±0.30	.XX	±0.20	.XXX	±0.1
DRAWING NO	ZS-00217-P	EDITION:A1		ITEM: H3		SCALE:1:1	
DRAWN BY	Deng jin quan	2021-12-25		UNIT:M.M			
APPROVAL BY	Chen xiao guang	2021-12-27					

TEL:0769-85305015 FAX:0769-85845060

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---