Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withtanding: AC 300V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105℃
Max processing temp: 230℃ for 60seconds
Max processing temp: 260℃ for 10seconds
Contact Material: Brass
Insulator material: Standard: Polyester,UL 94V-0
Standard: PA6T
Finish: Tin Gold Plated
Standard: Gold Flash all over

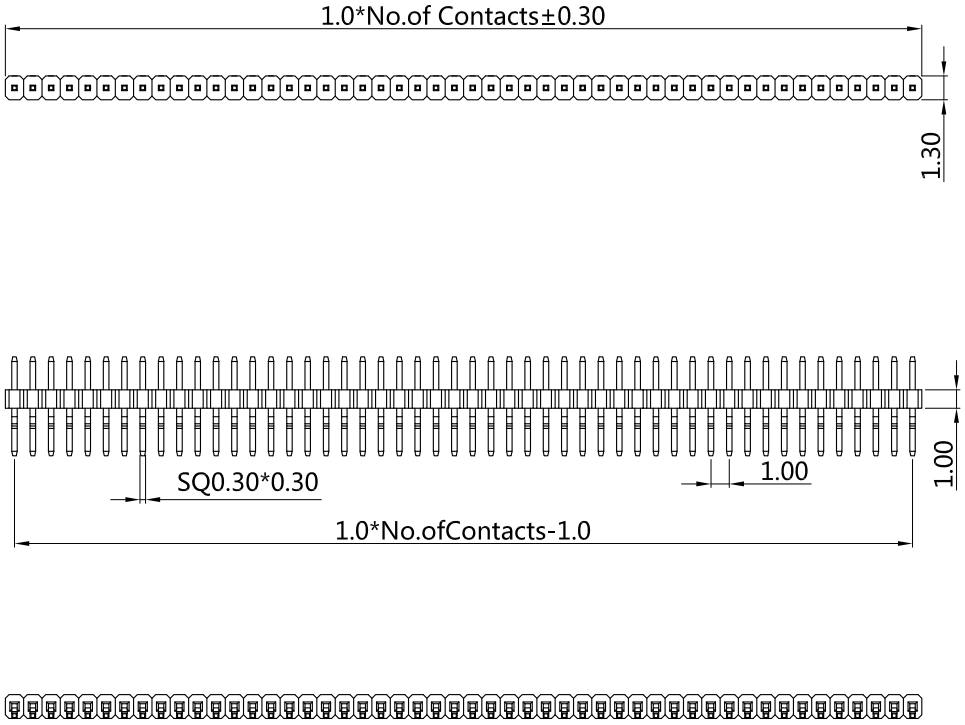



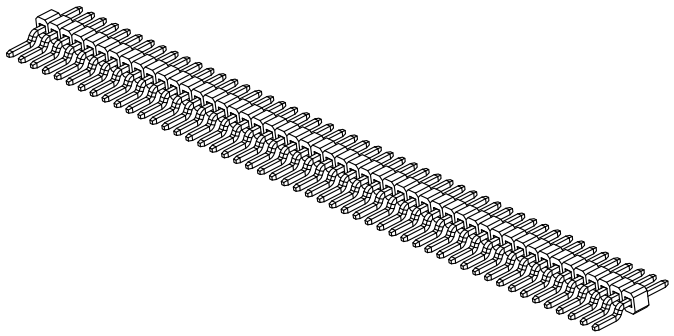

Recommended P.C. Board
SMD Layout

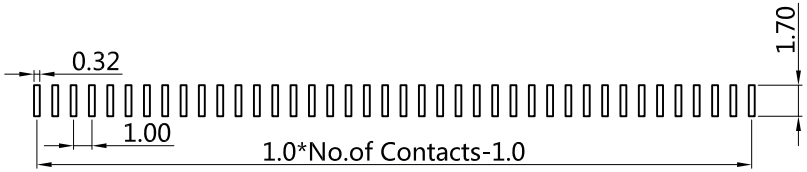

(RoHS Compliant)

H5 X 15 - 1 XX S0 BK X 032 X
1 2 3 4 5 6 7

1. Insultator material:
N=PA6T
L=LCP P=PA9T
2. Circuits:2-50 PIN
3. Taill Style:
DS=Lying paste
4. Color:
BK=Black

5. Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over nickel 150μ"
Y=Bright Tin over Nickel
F= Gold Flash, Matte Tin 100μ"
A=Gold 3μ"
B=Gold 3μ" , Matte Tin 100μ"
C = ordinary gold plating
D= Gold 5μ"
I= Gold 1μ"
E=Gold 5μ" , Matte Tin 100μ"
G=Gold 10μ"
J=Gold 10μ" , Matte Tin 100μ"
L= Gold 15μ"
M=Gold 15μ" , Matte Tin 100μ"
U= Gold 30μ"
V=Gold 30μ" Matte Tin 100μ"

6.Special Options

7. Packing:
A=Bag
B=Tube
D=Small box
E=Cap+Reel

东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD	PART NO.	H5X10-1XXDSBKX032X		.X ±0.30	.XX ±0.20	.XXX ±0.1
BOM 1:H5N15-150BKH0C4	DRAWING NO	ZS-10017-P	EDITION:A1		ITEM: H5	
BOM 2:SQ0.30-5.1-X-C12	DRAWN BY	Deng jin quan	2021-12-22		SCALE:1:1	
BOM 3:	APPROVAL BY	Chen xiao guang	2021-12-23		UNIT:M.M	
TEL:0769-85305015 FAX:0769-85845060						