
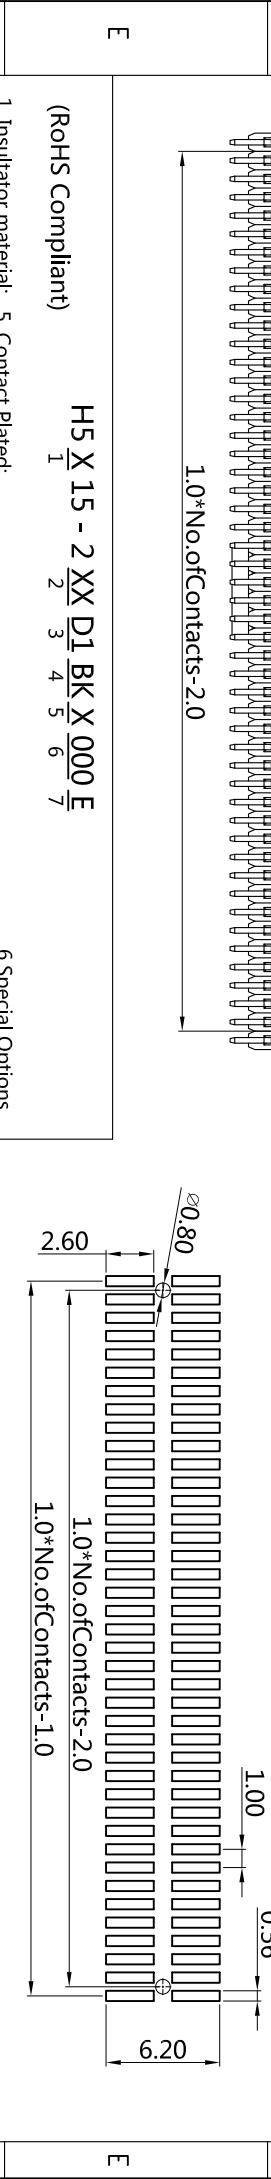
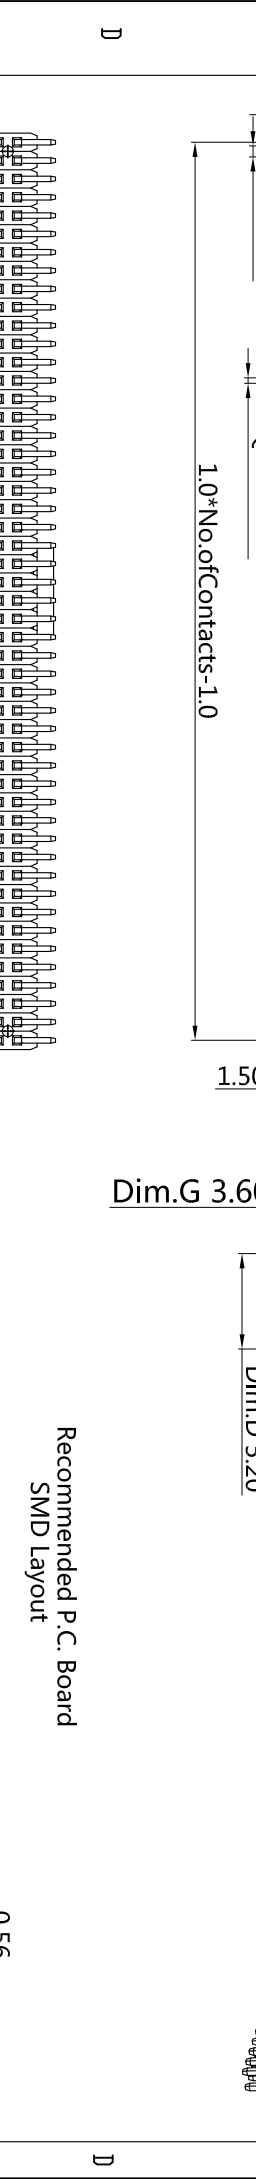
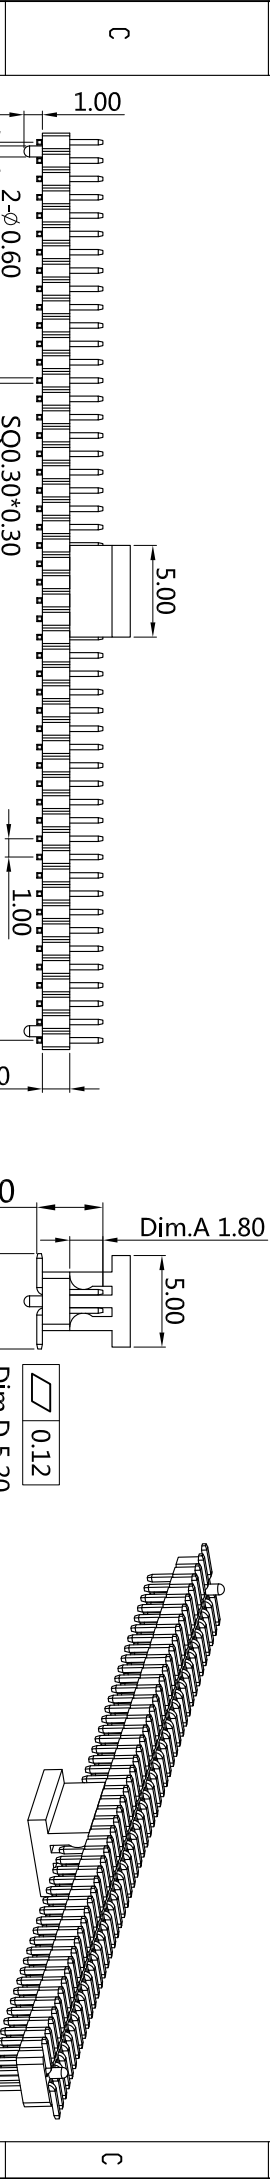


1	2	3	4	5	6	7	8
					Current Rating: 1 Amps Insulator Resistance: 1000 Megohms min Dielectric Withstanding: AC 300V Contact Resistance: 20mΩ MAX Operation Temperature: -40~+105°C Max processing temp: 230°C for 60seconds Max processing temp: 260°C for 10seconds Contact Material: Brass Insulator material: Standard: Polyester, UL 94V-0 Standard: PA6T		

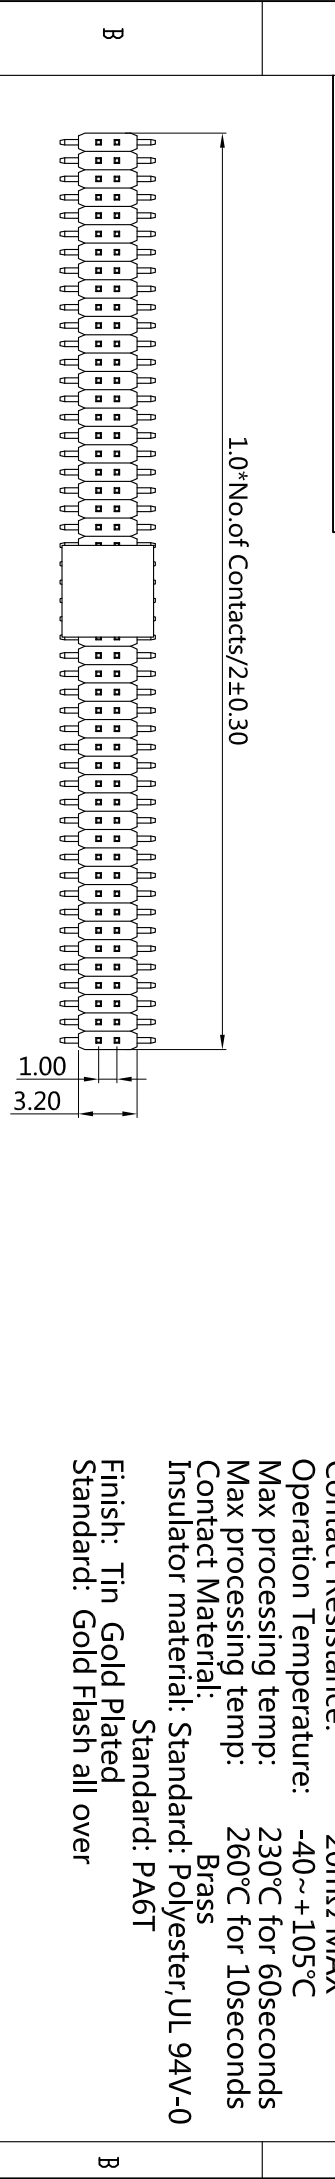

1. Insulator material: N=PA6T L=LCP P=PA9T 2. Circuits:2-50 PIN 3. Tail Style: D1=SMT+Pillars 4. Color: BK=Black		5. Contact Plated: T=Matte Tin over Nickel W=Matte Tin over nickel 150μ" Y=Bright Tin over Nickel F=Gold Flash, Matte Tin 100μ" A=Gold 3μ" B=Gold 3μ" C=ordinary gold plating D=Gold 5μ" I=Gold 1μ" E=Gold 5μ" G=Gold 10μ" J=Gold 10μ" L=Gold 15μ" M=Gold 15μ" U=Gold 30μ" V=Gold 30μ" Matte Tin 100μ"		6. Special Options		7. Packing: A=Bag B=Tube D=Small box E=Cap+Reel	
(RoHS Compliant)				H5 X 15 - 2 XX D1 BK X 000 E			
1. Insulator material: N=PA6T L=LCP P=PA9T 2. Circuits:2-50 PIN 3. Tail Style: D1=SMT+Pillars 4. Color: BK=Black		5. Contact Plated: T=Matte Tin over Nickel W=Matte Tin over nickel 150μ" Y=Bright Tin over Nickel F=Gold Flash, Matte Tin 100μ" A=Gold 3μ" B=Gold 3μ" C=ordinary gold plating D=Gold 5μ" I=Gold 1μ" E=Gold 5μ" G=Gold 10μ" J=Gold 10μ" L=Gold 15μ" M=Gold 15μ" U=Gold 30μ" V=Gold 30μ" Matte Tin 100μ"		6. Special Options		7. Packing: A=Bag B=Tube D=Small box E=Cap+Reel	
(RoHS Compliant)				H5 X 15 - 2 XX D1 BK X 000 E			

东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD TEL:0769-85305015 FAX:0769-85845060		PART NO. H5X15-2XXD1BKX000E DRAWING NO ZS-00282-P DRAWN BY Deng jin quan APPROVAL BY Chen xiao guang		.X ±0.30 .XX ±0.20 .XXX ±0.1		ITEM: H5 SCALE: 1:1 UNIT: M.M	
BOM 1:H5N15-250BKHC4 2:SQ0.30-5-4-X-C12 3:H5N-CAP-HO-C4		DRAWING NO ZS-00282-P DRAWN BY Deng jin quan APPROVAL BY Chen xiao guang		.X ±0.30 .XX ±0.20 .XXX ±0.1		ITEM: H5 SCALE: 1:1 UNIT: M.M	