


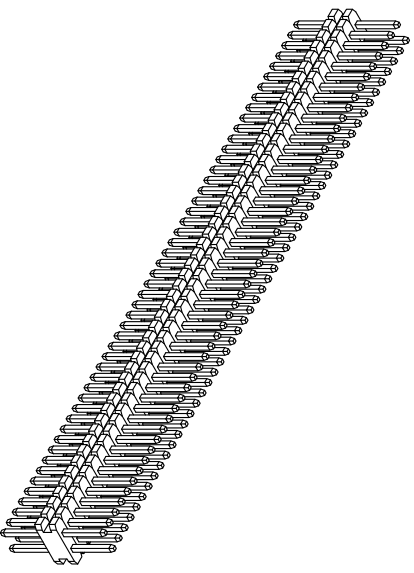



1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

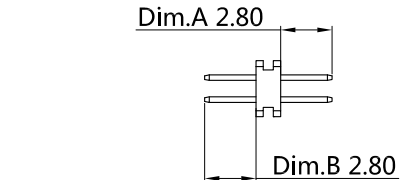

Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 300V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass
Insulator material: Standard: Polyester, UL 94V-0
Standard: PA6T
Finish: Tin Gold Plated
Standard: Gold Flash all over

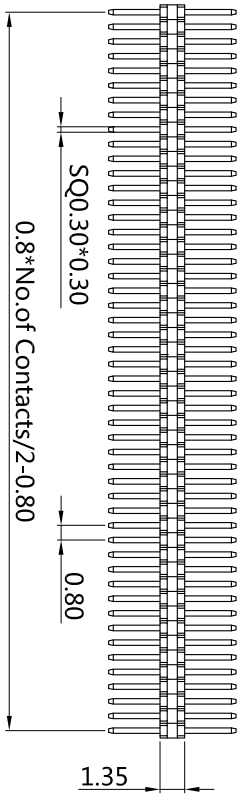

Recommended P.C. Board
SMD Layout

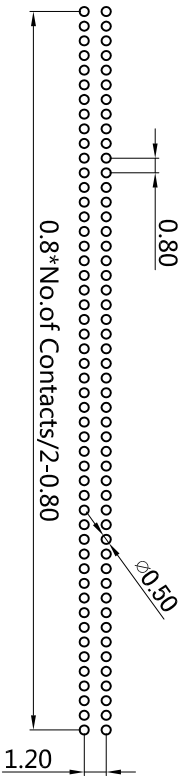

(RoHS Compliant)
H6 X 13 - 2 XX S0 BK X 000 X
 1 2 3 4 5 6 7

1. Insulator material: 5. Contact Plated: 6.Special Options

- N=PA6T T=Matte Tin over Nickel I=Gold 1μ"
- L=LCP P=PA9T W=Matte Tin over nickel 150μ" E=Gold 5μ" , Matte Tin 100μ"
- 2. Circuits:2-50 PIN Y=Bright Tin over Nickel G=Gold 10μ"
- 3. Tail Style: F=Gold Flash, Matte Tin 100μ" J=Gold 10μ" , Matte Tin 100μ"
- S0=180 A=Gold 3μ" L=Gold 15μ"
- 4. Color: B=Gold 3μ" , Matte Tin 100μ" M=Gold 15μ" , Matte Tin 100μ"
- BK=Black C = ordinary gold plating U = Gold 30μ"
- D = Gold 5μ" V=Gold 30μ" Matte Tin 100μ"

7. Packing:

- A=Bag
- B=Tube
- D=Small box
- E=Cap+Reel



东莞市震升电子有限公司
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:H6N13-250BKHC4	PART NO.	H6X13-2XXS0BKX000X	.X	.XX	.XXX
	2:SQ0.30-7.0-X-C12	DRAWING NO	ZS-00001-P	±0.30	±0.20	±0.1
	3:	DRAWN BY	Deng jin quan	EDITION:A1	2021-12-22	SCALE:1:1
		APPROVAL BY	Chen xiao guang		2021-12-23	UNIT:M.M

TEL:0769-85305015 FAX:0769-85845060