


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---



2.0*No.of Contacts/2+6.50±0.30


2.00

Standard: PA9T


Finish: nickel plated gold plated

Standard: Gold Flash all over


Current Rating: 2 Amps
 Insulator Resistance: 1000 Megohms min
 Dielectric Withstanding: AC 500V
 Contact Resistance: 20mΩ MAX
 Operation Temperature: -40~+105°C
 Max processing temp: 230°C for 60seconds
 Max processing temp: 260°C for 10seconds
 Contact Material: Brass
 Insulator material: Standard: Polyester,UL 94V-0

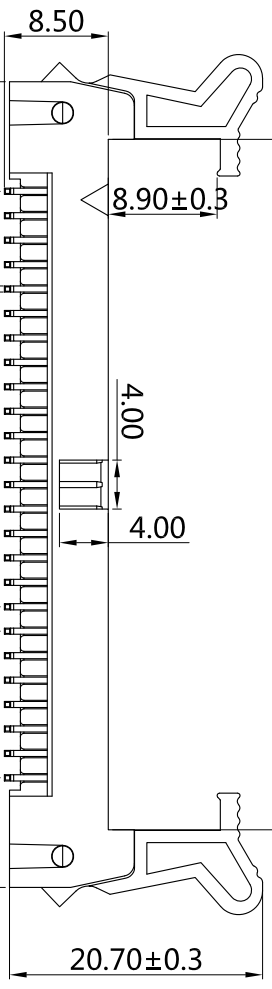


2.0*No.of Contacts/2-2.0



2.0*No.of Contacts/2+15.92±0.30

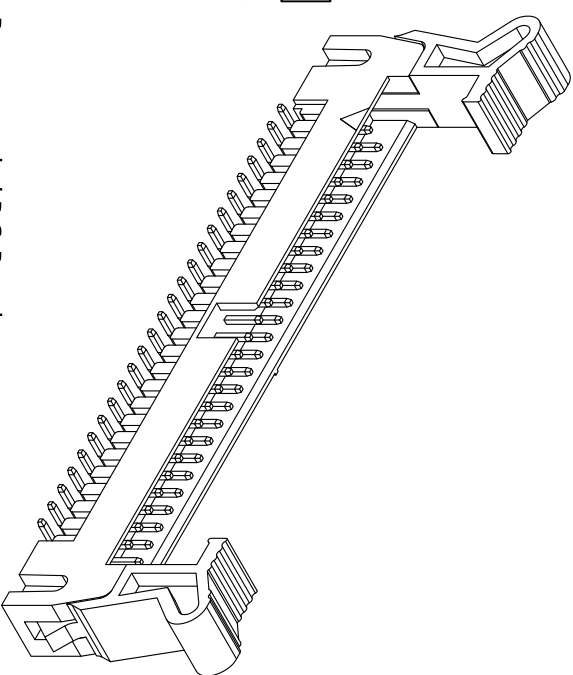

Recommended P.C. Board
SMD Layout



LH2 X - XX DL BK X 000 X

(RoHS Compliant)

1 2 3 4 5 6 7

- Insulator material:
N=PA9T L=LCP
P=PA9T
- Circuits: 20-50PIN
- Tail Style:
SL=Stright long ears
SS=Stright short ears
RL=Right angle long ears
RS=Right angle short ears
DL=SMT Long ears
DS=SMT Short ears
- Color: BK=Black
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over nickel 150μ"
Y=Bright Tin over Nickel
F=Gold Flash, Matte Tin 100μ"
A=Gold 3μ"
B=Gold 3μ"
D=Gold 5μ"
- Special Options
7. Packing:
B=Tube
C=Tray
E=Cap+Reel
F=Cap+tube
G=Cap+tray
H=Cap+bag
N=Tap&reel
- D=Gold 5μ"
I=Gold 11μ"
G=Gold 10μ"
J=Gold 10μ"
L=Gold 15μ"
M=Gold 15μ"
U=Gold 30μ"
V=Gold 30μ"



东莞市震升电子有限公司
DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

1: LH2N-50BKHD04	
BOM 2: SQ0 50-10.3-C-C12	
3: LH2N-BKESCA	

PART NO.	LH2X-XXDLBKX000X	X	.XX	.XXX
DRAWING NO	ZS-10004-N	±0.30	±0.20	±0.1
DRAWN BY	Deng jin quan	EDITION:A1	ITEM: LH2	SCALE:1:1
APPROVAL BY	Chen xiao quang	2022-11-30	2022-12-01	UNIT:M.M

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---