

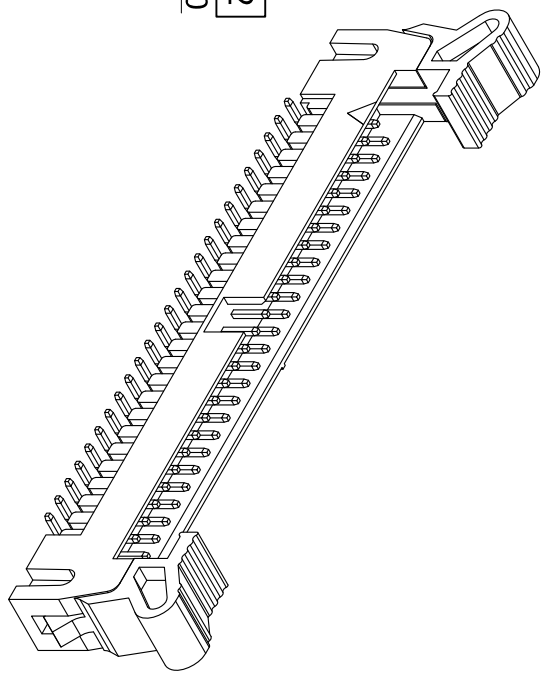


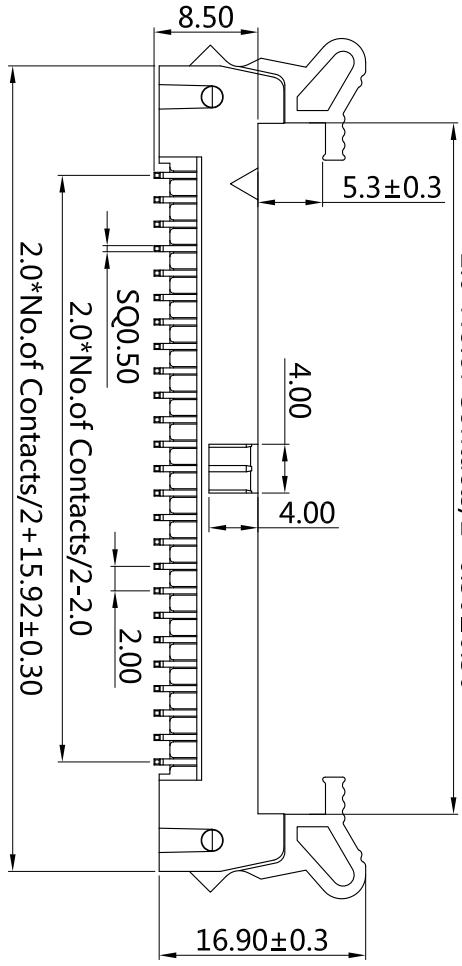


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

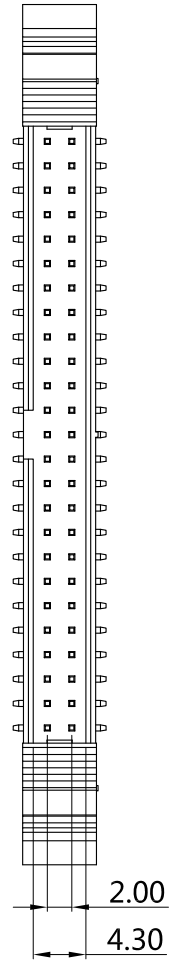

**Current Rating:** 2 Amps  
**Insulator Resistance:** 1000 Megohms min  
**Dielectric Withstanding:** AC 500V  
**Contact Resistance:** 20mΩ MAX  
**Operation Temperature:** -40~+105°C  
**Max processing temp:** 230°C for 60seconds  
**Max processing temp:** 260°C for 10seconds  
**Contact Material:** Brass  
**Insulator material:** Standard: Polyester, UL 94V-0  
**Standard:** PA9T  
**Finish:** nickel plated gold plated  
**Standard:** Gold Flash all over

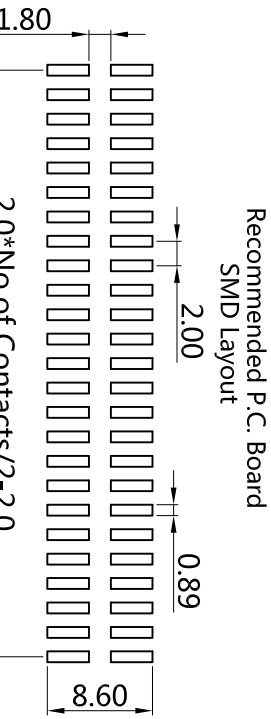

LH2 X - XX DS BK X 000 X

(RoHS Compliant)

- Insulator material:  
N=PA9T L=LCP
- Circuits: 20-50PIN
- Tail Style:  
SL=Stright long ears  
SS=Stright short ears  
RL=Right angle long ears  
RS=Right angle short ears  
DL=SMT Long ears  
DS=SMT Short ears
- Color: BK=Black
- Contact Plated:  
T=Matte Tin over Nickel  
W=Matte Tin over nickel 150μ"  
Y=Bright Tin over Nickel  
F= Gold Flash, Matte Tin 100μ"  
A=Gold 3μ"  
B=Gold 3μ"  
C = ordinary gold plating  
D= Gold 5μ"
- Special Options:  
D= Gold 5μ"  
I=Gold 11μ"  
G=Gold 10μ"  
J=Gold 10μ"  
L= Gold 15μ"  
M=Gold 15μ"  
U= Gold 30μ"  
V=Gold 30μ"  
B=Tube  
C=Tray  
E=Cap+Reel  
F=Cap+tube  
G=Cap+tray  
H=Cap+bag  
N=Tap&reel



东莞市震升电子有限公司  
DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:LH2N-50BKHD04	PART NO.	LH2X-XXDSBKX000X	X	.XX	.XXX
	2:SQ0.50-10.5-C-C12	DRAWING NO	ZS-10009-N	±0.30	±0.20	±0.1
	3:LH2N-BKESCA	DRAWN BY	Deng jin quan	EDITION:A1	ITEM: LH2	SCALE:1:1
		APPROVAL BY	Chen xiao guang	2022-11-30	2022-12-01	UNIT:M.M

TEL:0769-85305015 FAX:0769-85845060

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---