

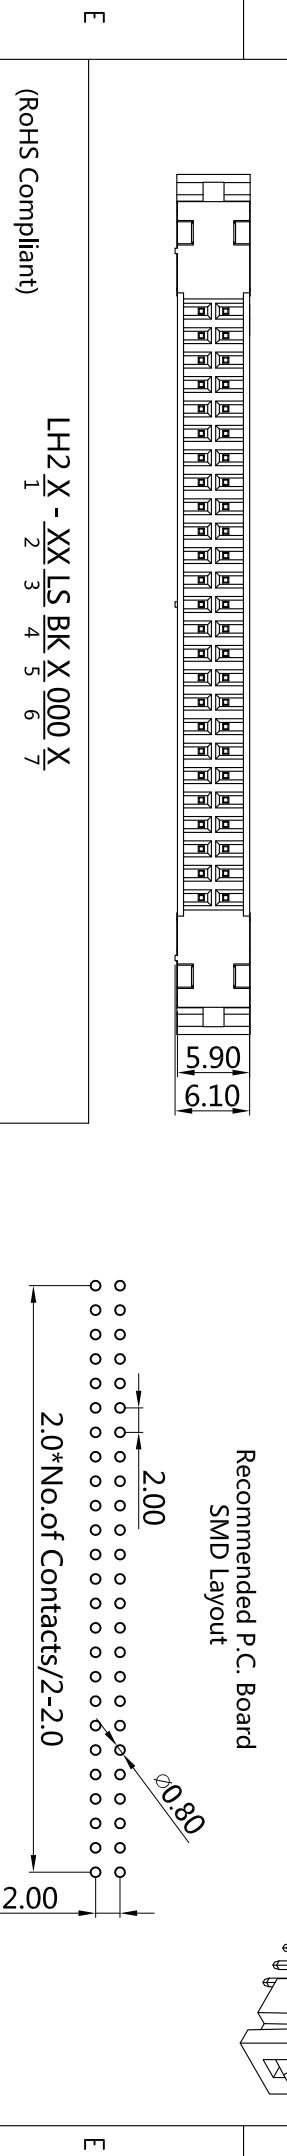


1	2	3	4	5	6	7	8
						Current Rating:	2 Amps
						Insulator Resistance:	1000 Megohms min
						Dielectric Withstanding:	AC 500V
						Contact Resistance:	20mΩ MAX
						Operation Temperature:	-40~+105°C
						Max processing temp:	230°C for 60seconds
						Max processing temp:	260°C for 10seconds
						Contact Material:	Brass
						Insulator material:	Standard: Polyester, UL 94V-0
						Standard:	PA9T
						Finish:	nickel plated gold plated
						Standard:	Gold Flash all over

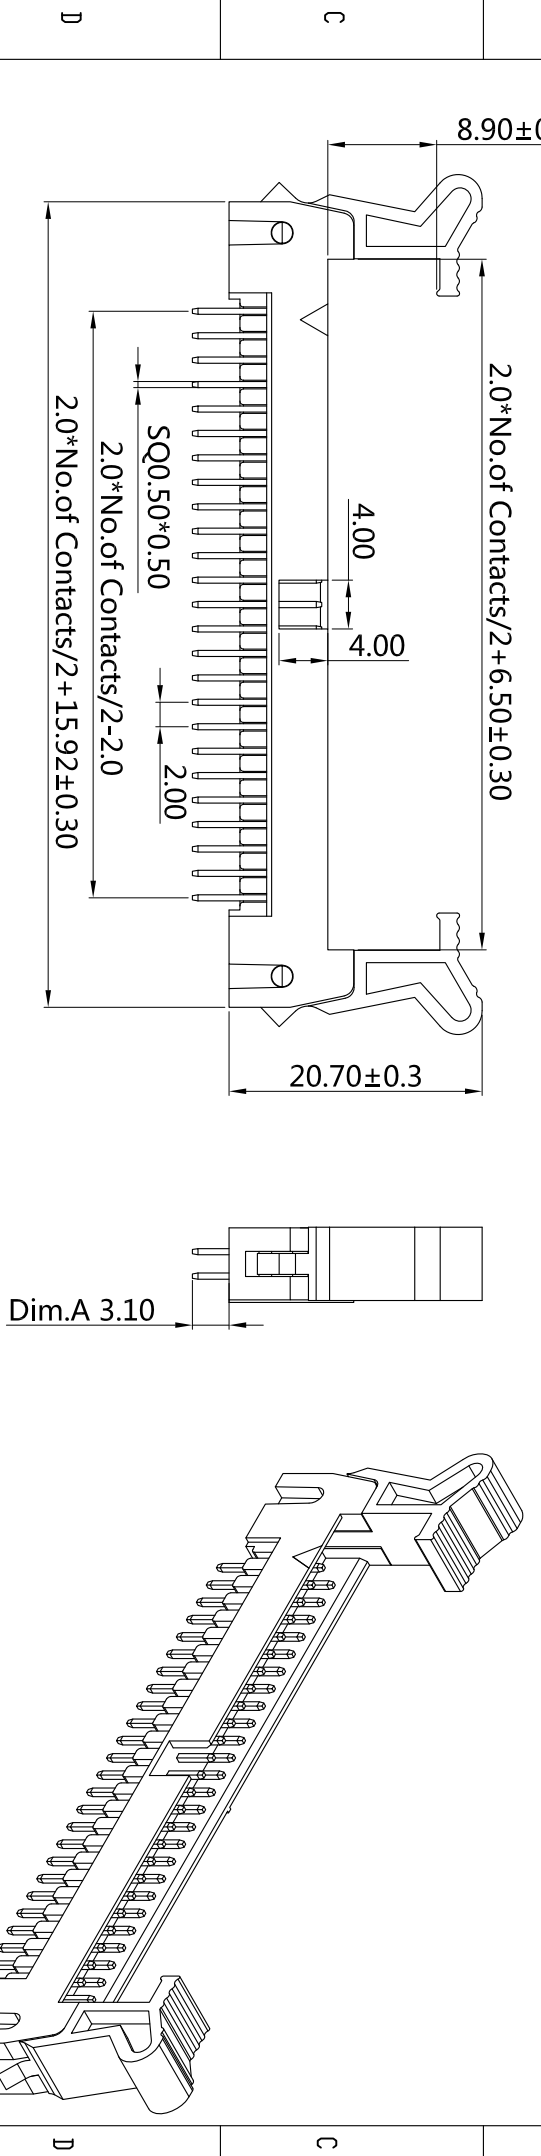

LH2 X - XX LS BK X 000 X  
1 2 3 4 5 6 7

- (RoHS Compliant)
- Insulator material:  
N=PA6T L=LCP  
P=PA9T
  - Circuits: 20-50PIN
  - Tail Style:  
SL=Stright long ears  
RS=Right angle long ears  
RL=Right angle short ears  
DL=SMT Long ears  
DS=SMT Short ears
  - Color: BK=Black
  - Contact Plated:  
T=Matte Tin over Nickel  
W=Matte Tin over nickel 150μ"  
Y=Bright Tin over Nickel  
F=Gold Flash, Matte Tin 100μ"  
A=Gold 3μ"  
B=Gold 3μ"  
C = ordinary gold plating  
D= Gold 5μ"
  - Special Options:  
D= Gold 5μ"  
I=Gold 11μ"  
G=Gold 10μ"  
J=Gold 10μ"  
L= Gold 15μ"  
M=Gold 15μ"  
U= Gold 30μ"  
V=Gold 30μ"  
B=Gold 3μ"  
C = ordinary gold plating  
D= Gold 5μ"
  - Packaging:  
B=Tube  
C=Tray  
E=Cap+Reel  
F=Cap+tray  
G=Cap+tray  
H=Cap+bag  
N=Tap&reel

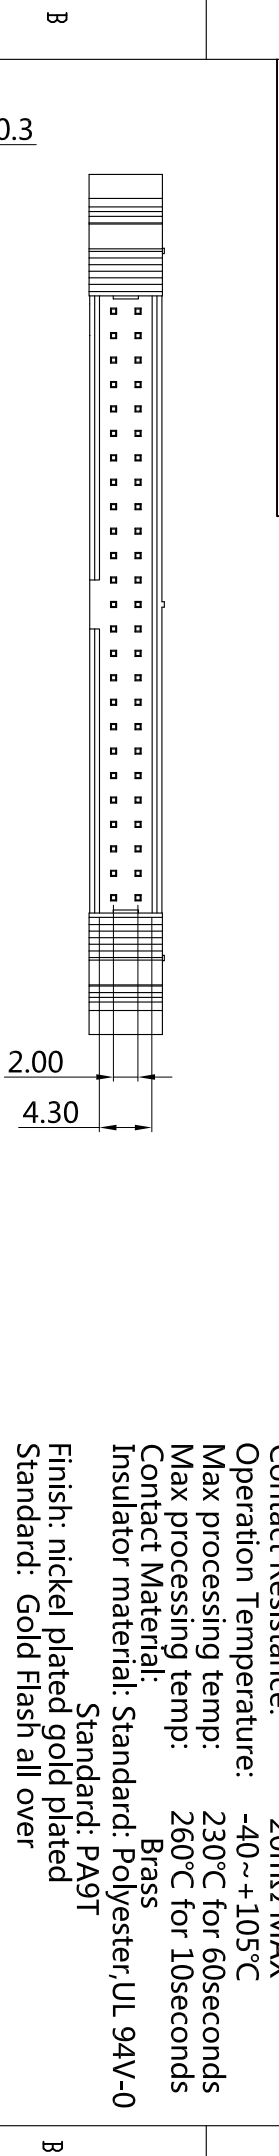

东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD	
1: LH2N-50BKHD04	PART NO. LH2X-XXLSBKX000X
2: SQ0.50-10.5-C-C12	DRAWING NO. ZS-10006-N
3: LH2N-BKESCA	DRAWN BY. Deng jin quan
	EDITION: A1
	2022-11-30
	SCALE: 1:1
	2022-12-01
	UNIT: M.M

TEL: 0769-85305015	FAX: 0769-85845060	APPROVAL BY: Chen xiao guang
--------------------	--------------------	------------------------------