

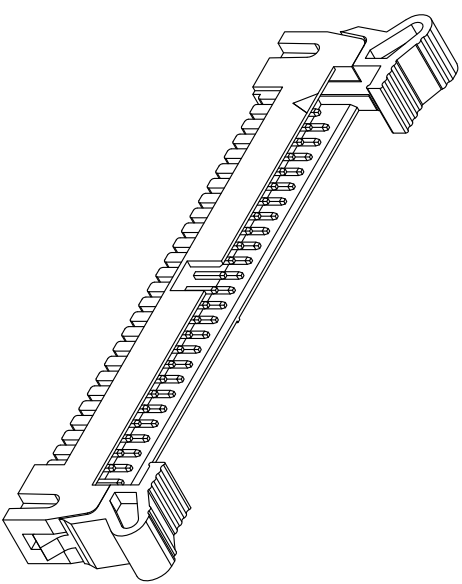

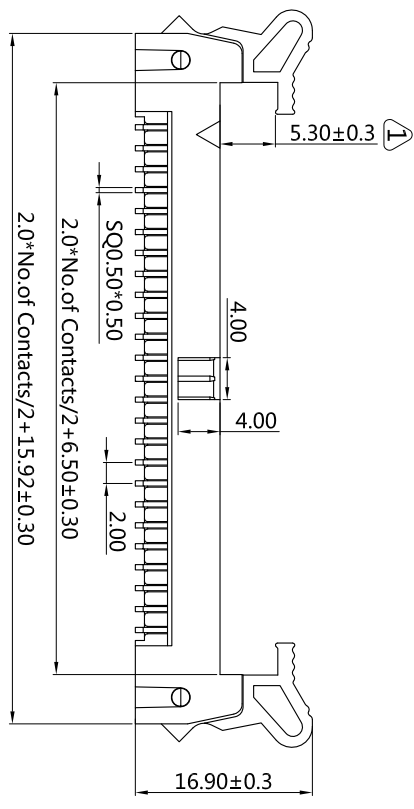
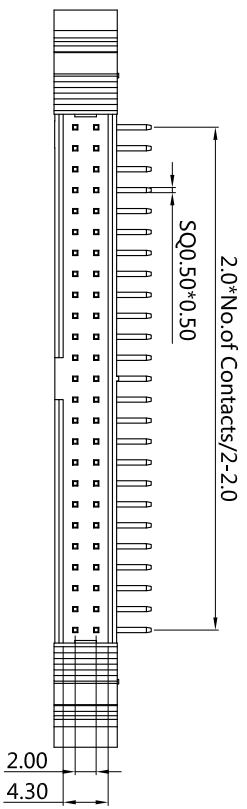


A		B		C		D		E		F	
---	--	---	--	---	--	---	--	---	--	---	--

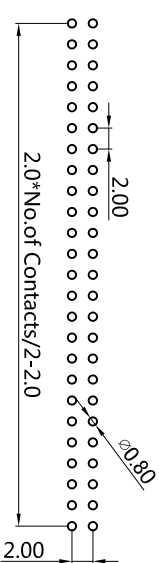

Current Rating: 2 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding: AC 500V  
 Contact Resistance: 20mΩ MAX  
 Operation Temperature: -40~+105°C  
 Max processing temp: 230°C for 60seconds  
 Max processing temp: 260°C for 10seconds  
 Contact Material: Brass  
 Insulator material: Standard: Polyester, UL 94V-0  
 Standard: PA6T  
 Finish: Tin Gold Plated  
 Standard: Gold Flash all over



Recommended P.C. Board  
 SMD Layout

**LH2 X - XX RS BK X 000 X**

1 2 3 4 5 6 7

1. Insulator material: N=PA6T, L=LCP, P=PA9T  
 2. Circuits: 20-50PIN  
 3. Tail Style: SL=Stright long ears, SS=Stright short ears, RL=Right angle long ears, RS=Right angle short ears, DL=SMT Long ears, DS=SMT Short eases

5. Contact Plated: T=Matte Tin over Nickel, W=Matte Tin over nickel 150μ", Y=Bright Tin over Nickel, F=Gold Flash, Matte Tin 100μ", A=Gold 3μ", B=Gold 3μ", D=Gold 5μ"

7. Special Options: B=Tube, C=Tray, E=Cap+Reel, F=Cap+tray, H=Cap+bag, N=Tap&reel

D=Gold 5μ", I=Gold 1μ", G=Gold 10μ", J=Gold 10μ", L=Gold 15μ", M=Gold 15μ", U=Gold 30μ", V=Gold 30μ"

6. Special Options: B=Tube, C=Tray, E=Cap+Reel, F=Cap+tray, H=Cap+bag, N=Tap&reel



东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM		DRAWING NO		PART NO.		DRAWN BY		APPROVAL BY	
1:LH2N-50BKH0C4	2:SQ0.50-10.0/14.0-C-C12	ZS-10008-N	Deng jin quan	LH2X-XXRSBKX000X	Chen xiao guang	X ±0.30	.XX ±0.20	.XXX ±0.1	ITEM:LH2 SCALE:1:1 UNIT:M:M
3:LH2N-BKESC4		DRAWN BY		APPROVAL BY		2022-11-30		2022-12-01	

TEL:0769-85305015 FAX:0769-85845060