

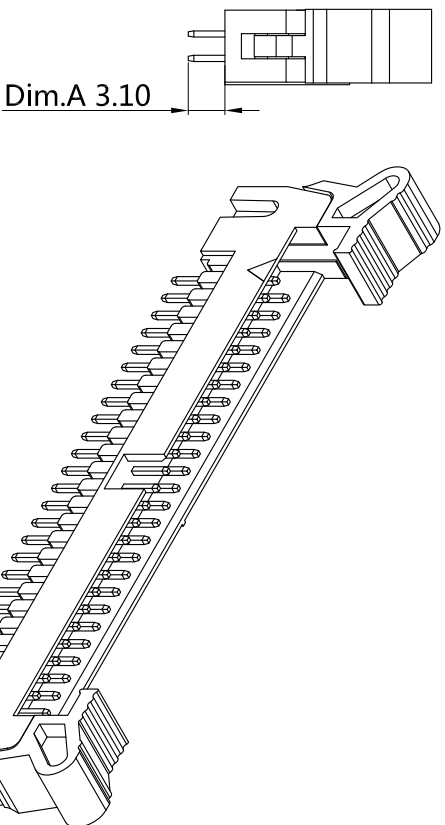
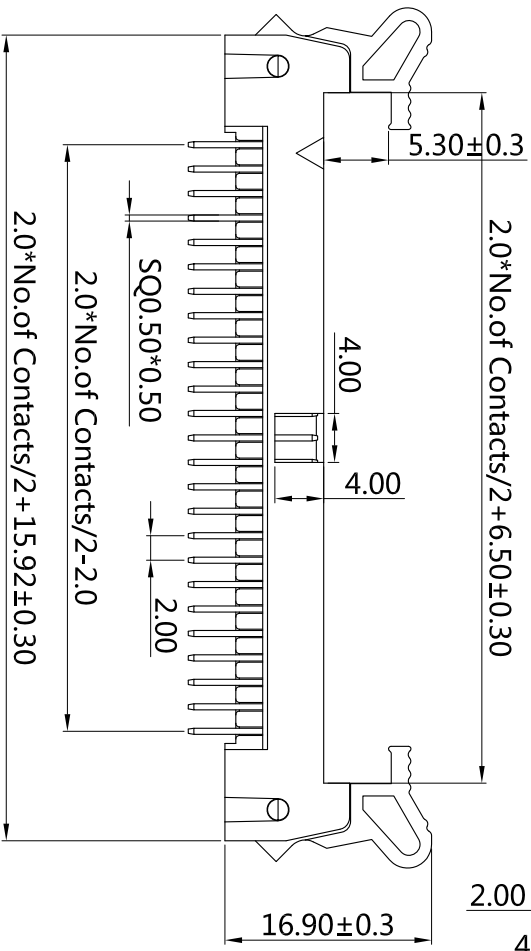


1	2	3	4	5	6	7	8
						Current Rating:	2 Amps
						Insulator Resistance:	1000 Megohms min
						Dielectric Withstanding:	AC 500V
						Contact Resistance:	20mΩ MAX
						Operation Temperature:	-40~+105°C
						Max processing temp:	230°C for 60seconds
						Max processing temp:	260°C for 10seconds
						Contact Material:	Brass
						Insulator material:	Standard: Polyester, UL 94V-0
						Standard:	PA9T
						Finish:	nickel plated gold plated
						Standard:	Gold Flash all over



Recommended P.C. Board
SMD Layout

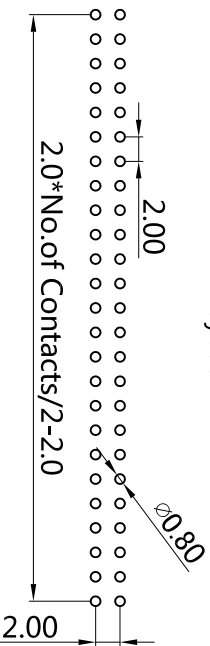

LH2 X - XX SS BK X 000 X

1 2 3 4 5 6 7

- Insulator material:
N=PA9T L=LCP
P=PA9T
- Circuits: 20-50PIN
- Tail Style:
SL=Stright long ears
SS=Stright short ears
RL=Right angle long ears
RS=Right angle short ears
DL=SMT Long ears
DS=SMT Short ears
- Color: BK=Black
5. Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over nickel 150μ"
Y=Bright Tin over Nickel
F= Gold Flash, Matte Tin 100μ"
A=Gold 3μ"
B=Gold 3μ"
D= Gold 5μ"
- Special Options
7. Packing:
B=Tube
C=Tray
E=Cap+Reel
F=Cap+tube
G=Cap+tray
H=Cap+bag
N=TapS reel
- D= Gold 5μ"
I=Gold 11μ"
G=Gold 10μ"
J=Gold 10μ"
L= Gold 15μ"
M=Gold 15μ"
U= Gold 30μ"
V=Gold 30μ"

(RoHS Compliant)

6.Special Options

7. Packing:



东莞市震升电子有限公司
DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:LH2N-50BKHD04	PART NO.	LH2X-XXSSBKX000X	X	.XX	.XXX
	2:SQ0 50-10.5-C-C12	DRAWING NO	ZS-10004-N	±0.30	±0.20	±0.1
	3:LH2N-BKESCA	DRAWN BY	Deng jin quan	EDITION:A1	2022-11-30	ITEM: LH2
		APPROVAL BY	Chen xiao guang		2022-12-01	SCALE:1:1
						UNIT:M.M

TEL:0769-85305015 FAX:0769-85845060

1	2	3	4	5	6	7	8
						Current Rating:	2 Amps
						Insulator Resistance:	1000 Megohms min
						Dielectric Withstanding:	AC 500V
						Contact Resistance:	20mΩ MAX
						Operation Temperature:	-40~+105°C
						Max processing temp:	230°C for 60seconds
						Max processing temp:	260°C for 10seconds
						Contact Material:	Brass
						Insulator material:	Standard: Polyester, UL 94V-0
						Standard:	PA9T
						Finish:	nickel plated gold plated
						Standard:	Gold Flash all over