
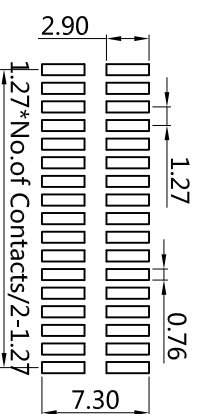


Current Rating: 1 Amps
Insulator Resistance: 1000 Megohms min
Dielectric Withstanding: AC 500V
Contact Resistance: 20mΩ MAX
Operation Temperature: -40~+105°C
Max processing temp: 230°C for 60seconds
Max processing temp: 260°C for 10seconds
Contact Material: Brass
Insulator material: Standard: Polyester, UL 94V-0
 Standard: LCP
Standard: Gold Flash all over

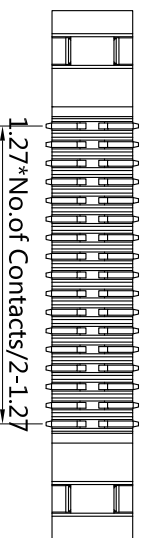

Recommended P.C. Board SMD Layout

(RoHS Compliant)
LH3 X - XX D0 BK X 000 X
 1 2 3 4 5 6 7

- Insulator material:
N=PA6T L=LCP
P=PA9T
- Circuits: 06-68P1N
- Tail Style:
S0=180°
R0=90°
D0=SMT
- Color: BK=Black
NC=natural colour
- Contact Plated:
T=Matte Tin over Nickel
W=Matte Tin over nickel 150µ"
Y=Bright Tin over Nickel
F=Gold Flash, Matte Tin 100µ"
A=Gold 3µ"
B=Gold 3µ"
C = ordinary gold plating
D= Gold 5µ"
- Special Options
- Packing:
B=Tube
C=Tray
E=Cap+Reel
F=Cap+tube
G=Cap+tray
H=Cap+bag
N=Tap&reel



东莞市震升电子有限公司
DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:LH3L-XXBKHC07
	2:LH3L-BKELC7
	3:SQ0.40-8.30-X-C12
TEL:	0769-85305015 FAX:0769-85845060

PART NO.	LH3X-XXD0BKX000X	X	.XX	.XXX
DRAWING NO	ZS-10001-N	±0.30	±0.20	±0.1
DRAWN BY	Deng jin quan	2022-11-30	SCALE:1:1	ITEM: LH3
APPROVAL BY	Chen xiao guang	2022-12-01	UNIT:M.M	

LH3X-XXD0BKX000E
ZS-10001-N