

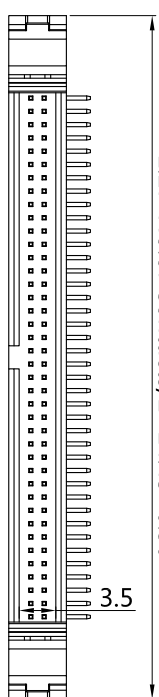
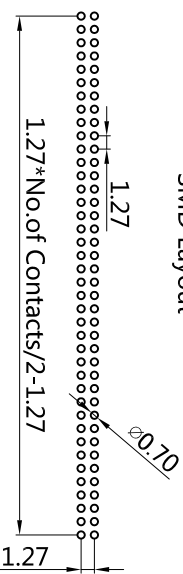
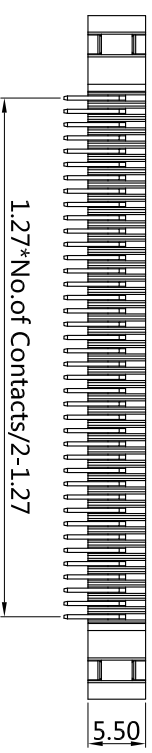
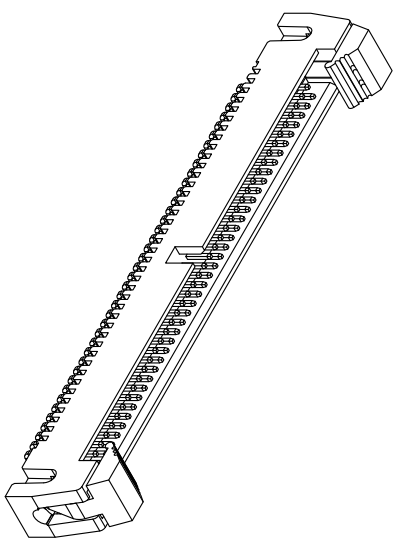


1.27\*No.of Contacts/2+14.45±0.30



Current Rating: 1 Amps  
 Insulator Resistance: 1000 Megohms min  
 Dielectric Withstanding: AC 500V  
 Contact Resistance: 20mΩ MAX  
 Operation Temperature: -40~+105°C  
 Max processing temp: 230°C for 60seconds  
 Max processing temp: 260°C for 10seconds  
 Contact Material: Brass  
 Insulator material: Standard: Polyester, UL 94V-0  
 Standard: LCP  
 Finish: nickel plated gold plated

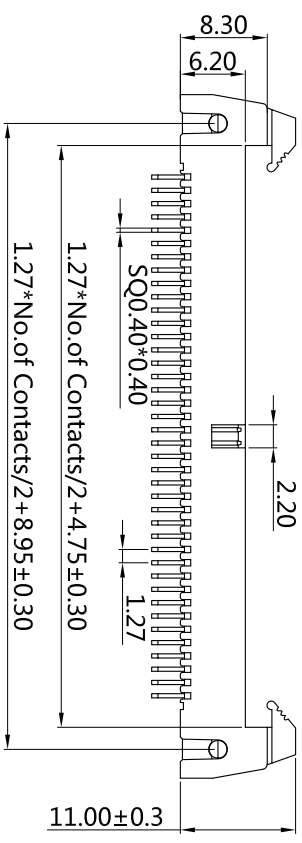

Recommended P.C. Board  
SMD Layout

(RoHS Compliant)  
**LH3 X - XX R0 BK X 000 E**  
 1 2 3 4 5 6 7

- Insulator material:  
 N=PA6T L=LCP  
 P=PA9T  
 2. Circuits: 6-68PIN  
 3. Tail Style:  
 SO=180°  
 R0=90°  
 D0=SMT  
 4. Color: BK=Black  
 NC=natural colour
- Contact Plated:  
 T=Matte Tin over Nickel  
 W=Matte Tin over nickel 150µ"  
 Y=Bright Tin over Nickel  
 F= Gold Flash, Matte Tin 100µ"  
 A=Gold 3µ"  
 B=Gold 3µ"  
 C = ordinary gold plating  
 D= Gold 5µ"
- Special Options  
 D= Gold 5µ"  
 I=Gold 1µ"  
 G=Gold 10µ"  
 J=Gold 10µ"  
 L= Gold 15µ"  
 M=Gold 15µ"  
 U= Gold 30µ"  
 V=Gold 30µ"
- Packing:  
 B=Tube  
 C=Tray  
 D=Box  
 E=Cap+Reel  
 F=Cap+tube  
 G=Cap+tray  
 N=Tap&reel



东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

|                                     |             |                  |            |            |           |
|-------------------------------------|-------------|------------------|------------|------------|-----------|
| 1:LH3L-68BKHC7                      | PART NO.    | LH3X-XXR0BKX000X | X          | .XX        | .XXX      |
| BOM 2:SQ0 5-11.15/13.7-1-C12        | DRAWING NO  | ZS-10003-N       | ±0.30      | ±0.20      | ±0.1      |
| 3:LH3L-BKELC7                       | DRAWN BY    | Deng jin quan    | EDITION:A1 | ITEM: LH3  | SCALE:1:1 |
| TEL:0769-85350515 FAX:0769-85845060 | APPROVAL BY | Chen xiao guang  | 2022-11-30 | 2022-12-01 | UNIT:M.M  |