

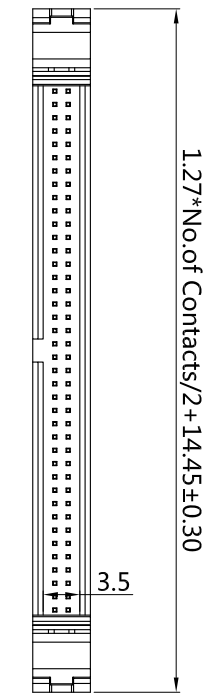
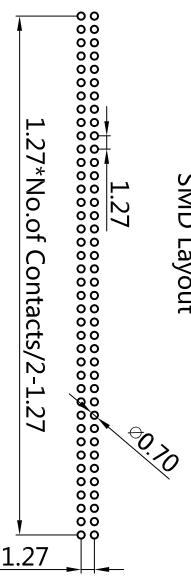
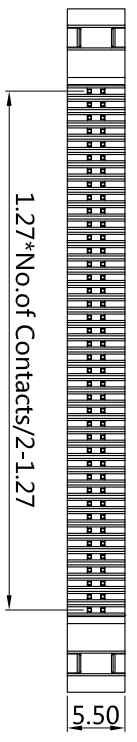
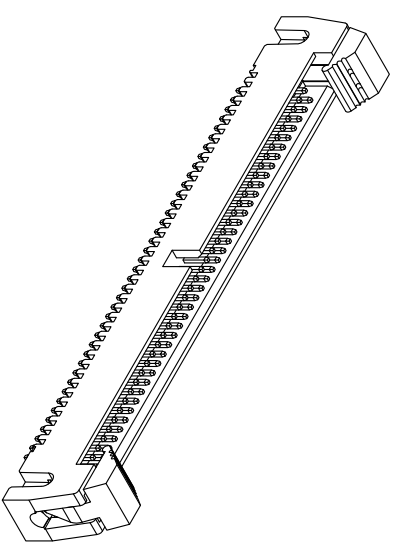


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---




**Current Rating:** 1 Amps  
**Insulator Resistance:** 1000 Megohms min  
**Dielectric Withstanding:** AC 500V  
**Contact Resistance:** 20mΩ MAX  
**Operation Temperature:** -40~+105°C  
**Max processing temp:** 230°C for 60seconds  
**Max processing temp:** 260°C for 10seconds  
**Contact Material:** Brass  
**Insulator material:** Standard: Polyester, UL 94V-0  
 Standard: LCP  
**Finish:** nickel plated gold plated

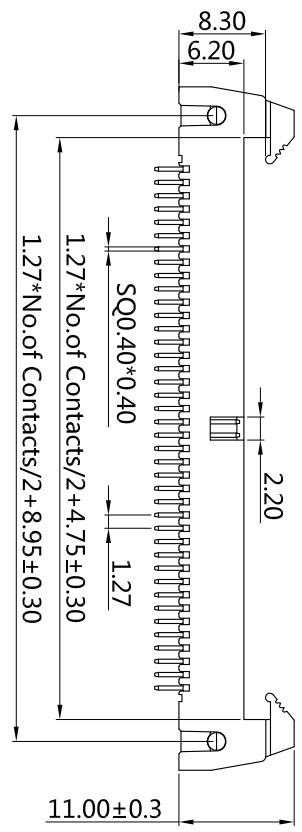

Recommended P.C. Board  
 SMD Layout

(RoHS Compliant)  
**LH3 X - XX S0 BK X 000 E**  
 1 2 3 4 5 6 7

- Insulator material:  
 N=PA6T L=LCP  
 P=PA9T  
 2. Circuits: 6-68PIN  
 3. Tail Style:  
 SO=180°  
 RO=90°  
 D0=SMT  
 4. Color: BK=Black  
 NC=natural colour
- Contact Plated:  
 T=Matte Tin over Nickel  
 W=Matte Tin over nickel 150μ"  
 Y=Bright Tin over Nickel  
 F=Gold Flash, Matte Tin 100μ"  
 A=Gold 3μ"  
 B=Gold 3μ"  
 C = ordinary gold plating  
 D= Gold 5μ"
- Special Options:  
 D= Gold 5μ"  
 I=Gold 11μ"  
 G=Gold 10μ"  
 J=Gold 10μ"  
 L= Gold 15μ"  
 M=Gold 15μ"  
 U= Gold 30μ"  
 V=Gold 30μ"  
 B=Tube  
 C=Tray  
 D=Box  
 E=Cap+Reel  
 F=Cap+tube  
 G=Cap+tray  
 N=TapSreel



东莞市震升电子有限公司  
 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD

BOM	1:LH3L-68BKHC7	DRAWING NO	ZS-10002-N	EDITION:A1	ITEM: LH3
	2:SQ0 5-8-0-1-C12	DRAWN BY	Deng jin quan	2022-11-30	SCALE:1:1
	3:LH3L-BKELC7	APPROVAL BY	Chen xiao guang	2022-12-01	UNIT:M.M

TEL:0769-853505015 FAX:0769-85845060	PART NO.	LH3X-XXS0BKX000X	.X	.XX	.XXX
	DRAWING NO	ZS-10002-N	±0.30	±0.20	±0.1
	DRAWN BY	Deng jin quan	2022-11-30	SCALE:1:1	UNIT:M.M
	APPROVAL BY	Chen xiao guang	2022-12-01		