







1 2 3 4 5 6 7 8



Current Rating: 2 Amps
Insulator Resistance: 1000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: AC 500 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Brass/Phosphor Bronz
Insulator Material: Polyester,UL 94V-0
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds

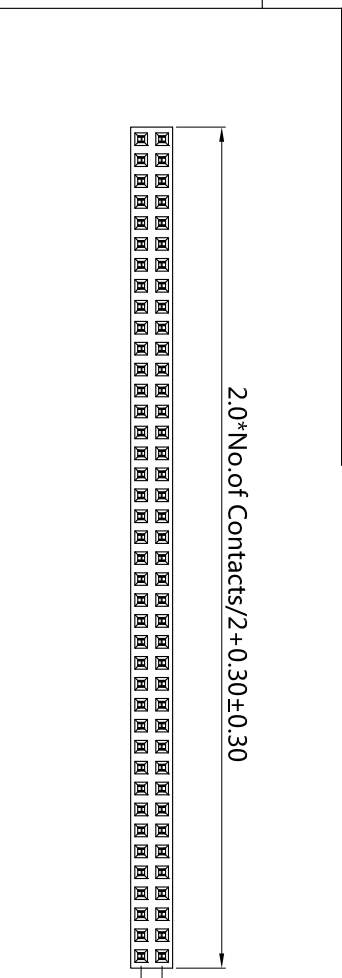

Current Rating: 2 Amps
Insulator Resistance: 1000 Megohms min
Contact Resistance: 20 m ohms max
Dielectric Withstanding: AC 500 V
Operating Temperature: - 40° ~ +105° C
Contact Material: Brass/Phosphor Bronz
Insulator Material: Polyester,UL 94V-0
Max Processing Temp: 230° C for 60 seconds
Max Processing Temp: 260° C for 10 seconds

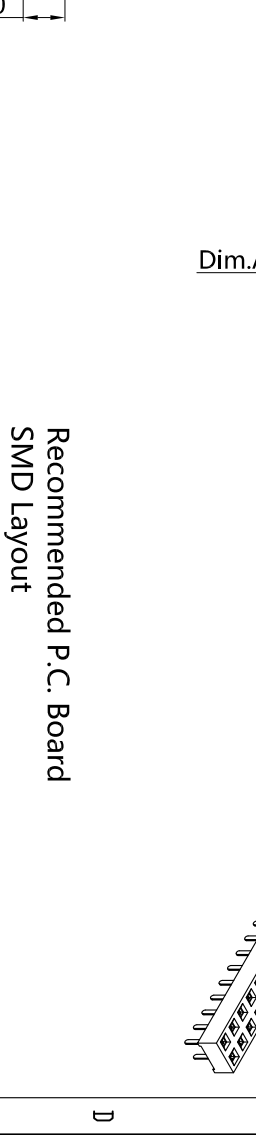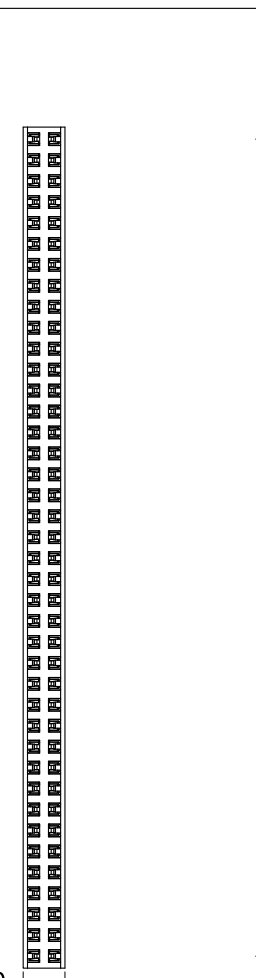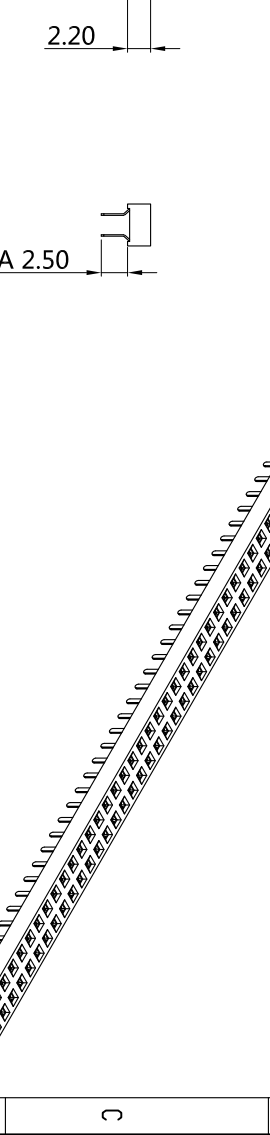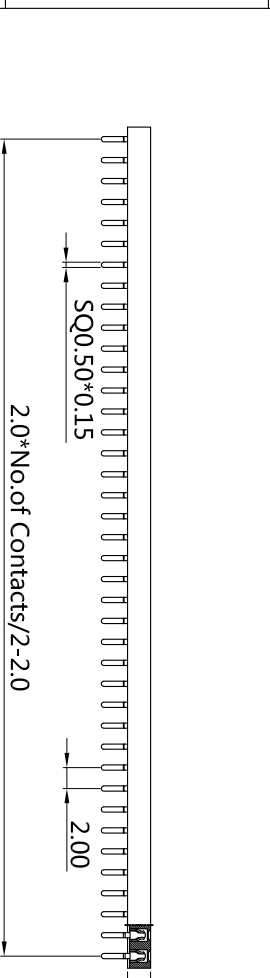


1. Insulator material:
 N=PA6T
 L=LCP P=PA9T
 2. A=Phosphor Bronz
 B=Brass
 3. Per Row:02-40PIN
 4. Tail Style:
 S0=180°
 5. Color:
 BK=Black

6. Contact Plated:
 T=Matte Tin over Nickel
 W=Matte Tin over nickel 150μ"
 Y=Bright Tin over Nickel
 C = Putfin
 F= Gold Flash, Matte Tin 100μ"
 A=Gold 3μ"
 B=Gold 3μ"
 D= Gold 5μ"

7.Special Options
 I = gold plated 1 μ
 E=Gold 5μ"
 G=Gold 10μ"
 J=Gold 10μ"
 L= Gold 15μ"
 M=Gold 15μ"
 U= Gold 30μ"
 V=Gold 30μ"
 H= Contact area 1U"
 8. Packing:
 B=Tube
 C=Tray
 E=Cap+Reel
 F=Cap+tube
 G=Cap+tray
 I=Mylar+Reel

(RoHS Compliant)
 P2 X 22 X - 2 XX SOBK X 000 X
 1 2 3 4 5 6 7 8

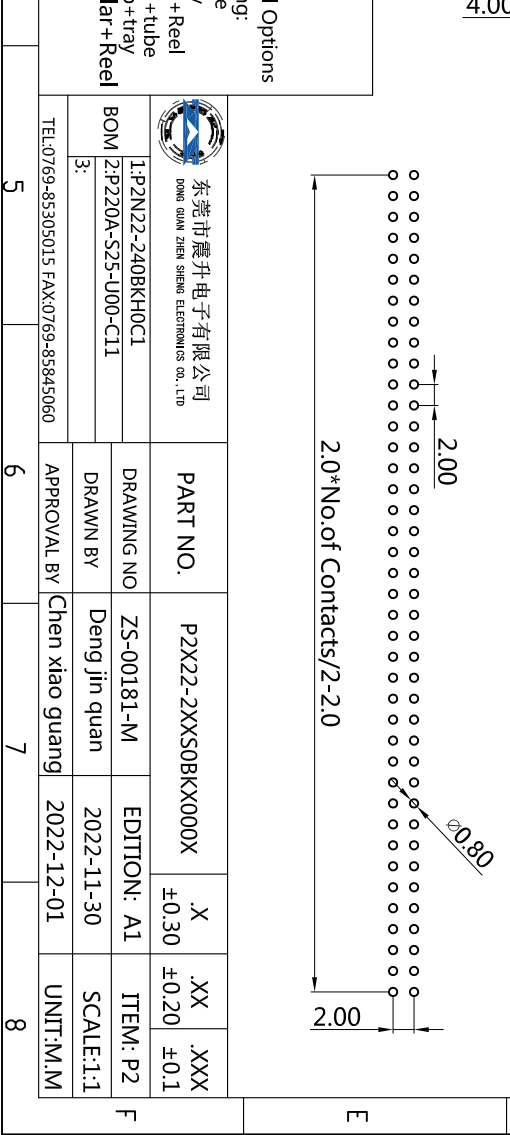

1 2 3 4 5 6 7 8

		东莞市震升电子有限公司 DONG GUAN ZHEN SHENG ELECTRONICS CO., LTD	
BOM 1:	P2N22-240BKHC1	PART NO.	P2X22-2XXSOBKX000X
BOM 2:	P220A-S25-U00-C11	DRAWING NO	ZS-00181-M
BOM 3:		DRAWN BY	Deng jin quan
		EDITION:	A1
		SCALE:	1:1
		APPROVAL BY	Chen xiao guang
			2022-12-01
		UNIT:	M.M

TEL:0769-85305015 FAX:0769-85845060